


TLV757P 1A、低  $I_Q$ 、小型、低压降稳压器

## 1 特性


- 采用 SOT-23 (DYD) 封装，具有  $60.3^{\circ}\text{C/W } R_{\theta JA}$
- 输入电压范围：1.45V 至 5.5V
- 可提供固定输出电压：
  - 0.6V 至 5V (阶跃为 50mV)
- 低  $I_Q$ ：25  $\mu\text{A}$  (典型值)
- 低压降：
  - 在 1A 下为 425mV (最大值) ( $V_{OUT}$  为 3.3V)
- 输出精度：1% (最大值)
- 内置软启动功能，具有单调  $V_{OUT}$  上升
- 折返电流限制
- 有源输出放电
- 高 PSRR：100kHz 时为 45dB
- 与 1 $\mu\text{F}$  的陶瓷输出电容器搭配使用时可保持稳定
- 封装：
  - 2.9mm  $\times$  2.8mm SOT-23-5 (DBV)
  - 带有散热焊盘的 2.9mm  $\times$  2.8mm SOT-23-5 (DYD)
  - 2mm  $\times$  2mm WSON-6 (DRV)

## 2 应用

- 机顶盒、电视和游戏机
- 便携式和电池供电类设备
- 台式机、笔记本电脑和超极本
- 平板电脑和遥控器
- 白色家电和电器
- 电网基础设施和保护继电器
- 摄像头模块和图像传感器

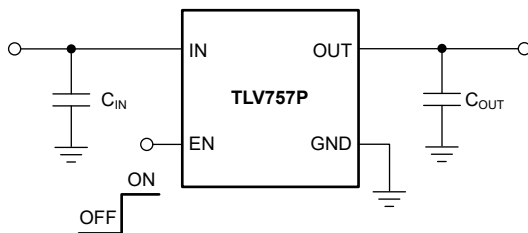

典型应用

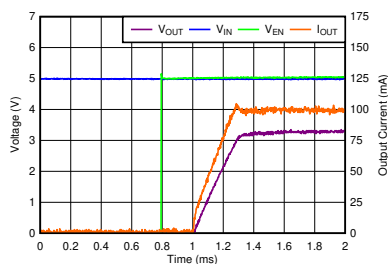

启动波形

## 3 说明

TLV757P 低压降稳压器 (LDO) 是一款超小型低静态电流 LDO，可提供 1A 拉电流，具有良好的线路和负载瞬态性能。TLV757P 经过优化，可支持 1.45V 至 5.5V 的输入电压范围，可适用于各种应用。为最大限度地缩减成本和解决方案尺寸，该器件可在 0.6V 至 5V 范围内提供固定输出电压。此范围支持现代微控制器 (MCU) 更低的内核电压。此外，TLV757P 具备带有使能功能的低  $I_Q$ ，从而可将待机功耗降至最低。该器件具有内部软启动功能，可降低浪涌电流。该功能可为负载提供受控电压并在启动过程中更大程度地降低输入电压压降。关断时，该器件可主动下拉输出以使输出快速放电并实现已知的启动状态。

TLV757P 在与支持小尺寸总体解决方案的小型陶瓷输出电容器搭配使用时，可保持稳定。高精度带隙与误差放大器支持 1% 的典型精度。所有器件版本均具有集成的热关断保护、电流限制和低压锁定 (UVLO) 功能。TLV757P 具有内部折返电流限制，有助于在发生短路时减少热耗散。

TLV757 采用流行的 SON 和 SOT23-5 封装。此器件还采用带有散热焊盘的热增强型 SOT23-5 封装 (DYD)。与标准 SOT23-5 封装相比，此封装可显著降低热阻。

## 封装信息

| 器件型号    | 封装 <sup>(1)</sup>  | 封装尺寸 <sup>(2)</sup>  |
|---------|--------------------|----------------------|
| TLV757P | DRV ( WSON , 6 )   | 2mm $\times$ 2mm     |
|         | DBV ( SOT-23 , 5 ) | 2.9mm $\times$ 2.8mm |
|         | DYD ( SOT-23 , 5 ) | 2.9mm $\times$ 1.6mm |

(1) 如需更多信息，请参阅 [机械、封装和可订购信息](#)。

(2) 封装尺寸 (长  $\times$  宽) 为标称值，并包括引脚 (如适用)。



## Table of Contents

|                                                |           |                                                                  |           |
|------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                              | <b>1</b>  | <b>7 Application and Implementation</b> .....                    | <b>16</b> |
| <b>2 应用</b> .....                              | <b>1</b>  | 7.1 Application Information.....                                 | 16        |
| <b>3 说明</b> .....                              | <b>1</b>  | 7.2 Typical Application.....                                     | 20        |
| <b>4 Pin Configuration and Functions</b> ..... | <b>3</b>  | 7.3 Power Supply Recommendations.....                            | 21        |
| <b>5 Specifications</b> .....                  | <b>4</b>  | 7.4 Layout.....                                                  | 22        |
| 5.1 Absolute Maximum Ratings.....              | 4         | <b>8 Device and Documentation Support</b> .....                  | <b>23</b> |
| 5.2 ESD Ratings .....                          | 4         | 8.1 Device Support.....                                          | 23        |
| 5.3 Recommended Operating Conditions.....      | 4         | 8.2 接收文档更新通知.....                                                | 23        |
| 5.4 Thermal Information.....                   | 5         | 8.3 支持资源.....                                                    | 23        |
| 5.5 Electrical Characteristics.....            | 5         | 8.4 Trademarks.....                                              | 23        |
| 5.6 Typical Characteristics.....               | 8         | 8.5 静电放电警告.....                                                  | 23        |
| <b>6 Detailed Description</b> .....            | <b>13</b> | 8.6 术语表.....                                                     | 23        |
| 6.1 Overview.....                              | 13        | <b>9 Revision History</b> .....                                  | <b>23</b> |
| 6.2 Functional Block Diagram.....              | 13        | <b>10 Mechanical, Packaging, and Orderable Information</b> ..... | <b>24</b> |
| 6.3 Feature Description.....                   | 13        |                                                                  |           |
| 6.4 Device Functional Modes.....               | 15        |                                                                  |           |

## 4 Pin Configuration and Functions

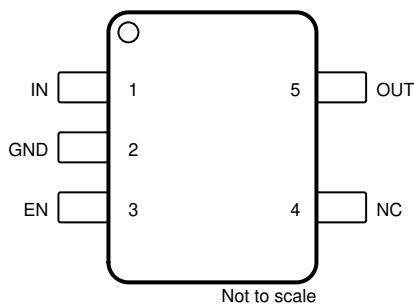


图 4-1. DBV Package, 5-Pin SOT-23 (Top View)

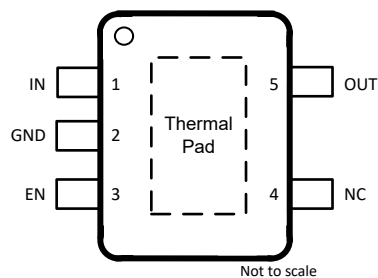


图 4-2. DYD Package, 5-Pin SOT-23 With Exposed Thermal Pad (Top View)




图 4-3. DRV Package, 6-Pin WSON With Exposed Thermal Pad (Top View)

表 4-1. Pin Functions

| NAME        | PIN |     |      | TYPE | DESCRIPTION                                                                                                                                                                                                                  |
|-------------|-----|-----|------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | DBV | DYD | DRV  |      |                                                                                                                                                                                                                              |
| EN          | 3   | 3   | 4    | I    | Enable pin. Drive EN greater than $V_{HI}$ to turn on the regulator. Drive EN less than $V_{LO}$ to place the LDO into shutdown mode.                                                                                        |
| GND         | 2   | 2   | 3    | —    | Ground pin.                                                                                                                                                                                                                  |
| IN          | 1   | 1   | 6    | I    | Input pin. A capacitor with a value of 1 $\mu$ F or larger is required from this pin to ground. <sup>(1)</sup> See the <a href="#">Input and Output Capacitor Selection</a> section for more information.                    |
| NC          | 4   | 4   | 2, 5 | —    | No internal connection.                                                                                                                                                                                                      |
| OUT         | 5   | 5   | 1    | O    | Regulated output voltage pin. A capacitor with a value of 1 $\mu$ F or larger is required from this pin to ground. <sup>(1)</sup> See the <a href="#">Input and Output Capacitor Selection</a> section for more information. |
| Thermal pad | —   | Pad | Pad  | —    | Connect the thermal pad to a large-area ground plane. The thermal pad is internally connected to GND.                                                                                                                        |

(1) Make sure the nominal input and output capacitance are greater than 0.47 $\mu$ F. Throughout this document the nominal derating on these capacitors is 50%. Make sure that the effective capacitance at the pin is greater than 0.47 $\mu$ F.

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                             | MIN   | MAX                  | UNIT |
|---------------------------------------------|-------|----------------------|------|
| Supply voltage, $V_{IN}$                    | - 0.3 | 6.0                  | V    |
| Enable voltage, $V_{EN}$                    | - 0.3 | 6.0                  | V    |
| Output voltage, $V_{OUT}$                   | - 0.3 | $V_{IN} + 0.3^{(2)}$ | V    |
| Operating junction temperature range, $T_J$ | - 40  | 150                  | °C   |
| Storage temperature, $T_{slg}$              | - 65  | 150                  | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The absolute maximum rating is  $V_{IN} + 0.3V$  or  $6.0V$ , whichever is smaller

### 5.2 ESD Ratings

|             |                         |                                                                                | VALUE | UNIT |
|-------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±1000 | V    |
|             |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500V HBM is possible with the necessary precautions.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250V CDM is possible with the necessary precautions.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|           |                         | MIN  | NOM | MAX | UNIT |
|-----------|-------------------------|------|-----|-----|------|
| $V_{IN}$  | Input voltage           | 1.45 |     | 5.5 | V    |
| $V_{OUT}$ | Output voltage          | 0.6  |     | 5.0 | V    |
| $V_{EN}$  | Enable voltage          | 0    |     | 5.5 | V    |
| $I_{OUT}$ | Output current          | 0    |     | 1   | A    |
| $C_{IN}$  | Input capacitor         | 1    |     |     | μF   |
| $C_{OUT}$ | Output capacitor        | 1    |     | 200 | μF   |
| $f_{EN}$  | Enable toggle frequency |      |     | 10  | kHz  |
| $T_J$     | Junction temperature    | - 40 |     | 125 | °C   |

## 5.4 Thermal Information

| PCB   | THERMAL METRIC <sup>(1)</sup> (2) |                                              | TLV757       |              |           | UNIT |
|-------|-----------------------------------|----------------------------------------------|--------------|--------------|-----------|------|
|       |                                   |                                              | DYD (SOT-23) | DBV (SOT-23) | DRV (SON) |      |
|       |                                   |                                              | 5 PINS       | 5 PINS       | 6 PINS    |      |
| EVM   | $R_{\theta JA}$                   | Junction-to-ambient thermal resistance       | 60.3         | 100.8        | N/A       | °C/W |
|       | $\psi_{JT}$                       | Junction-to-top characterization parameter   | 14.2         | 23.3         | N/A       | °C/W |
|       | $\psi_{JB}$                       | Junction-to-board characterization parameter | 35.9         | 67.8         | N/A       | °C/W |
| JEDEC | $R_{\theta JA}$                   | Junction-to-ambient thermal resistance       | 92.5         | 231.1        | 100.2     | °C/W |
|       | $R_{\theta JC(top)}$              | Junction-to-case (top) thermal resistance    | 119.8        | 118.4        | 108.5     | °C/W |
|       | $R_{\theta JB}$                   | Junction-to-board thermal resistance         | 45.8         | 64.4         | 64.3      | °C/W |
|       | $\psi_{JT}$                       | Junction-to-top characterization parameter   | 16.7         | 28.4         | 10.4      | °C/W |
|       | $\psi_{JB}$                       | Junction-to-board characterization parameter | 44.9         | 63.8         | 64.8      | °C/W |
|       | $R_{\theta JC(bot)}$              | Junction-to-case (bottom) thermal resistance | 34.3         | N/A          | 34.7      | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.
- (2) JEDEC thermal metrics apply to JEDEC standard PCB (2s2p, no vias to internal plane and bottom layer). EVM metrics apply to the LP087A EVM with an exposed pad SOT-23-5 (DYD) layout.

## 5.5 Electrical Characteristics

over operating free-air temperature range ( $T_J = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ),  $V_{IN} = V_{OUT} + 0.5\text{ V}$  or  $1.45\text{ V}$  (whichever is greater),  $I_{OUT} = 1\text{ mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$  (unless otherwise noted); all typical values are at  $T_J = 25^{\circ}\text{C}$ .

| PARAMETER                        |                             | TEST CONDITIONS                                                                                   |                                                                             | MIN  | TYP   | MAX  | UNIT          |
|----------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|------|-------|------|---------------|
| $V_{IN}$                         | Input voltage               |                                                                                                   |                                                                             | 1.45 |       | 5.5  | V             |
| $V_{OUT}$                        | Output voltage              |                                                                                                   |                                                                             | 0.6  |       | 5.0  | V             |
|                                  | Output accuracy             | $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ , $V_{OUT} \geq 1\text{ V}$                |                                                                             | -1   |       | 1    | %             |
|                                  |                             | $-40^{\circ}\text{C} \leq T_J \leq 85^{\circ}\text{C}$ , $0.6\text{ V} \leq V_{OUT} < 1\text{ V}$ |                                                                             | -10  |       | 10   | mV            |
|                                  |                             | $V_{OUT} \geq 1\text{ V}$                                                                         |                                                                             | -1.5 |       | 1.5  | %             |
|                                  |                             | $0.6\text{ V} \leq V_{OUT} < 1\text{ V}$                                                          |                                                                             | -15  |       | 15   | mV            |
| $(\Delta V_{OUT})/\Delta V_{IN}$ | Line regulation             | $V_{OUT} + 0.5\text{ V}^{(1)} \leq V_{IN} \leq 5.5\text{ V}$                                      |                                                                             |      | 2     |      | mV            |
| $\Delta V_{OUT}/\Delta I_{OUT}$  | Load regulation             | $0.1\text{ mA} \leq I_{OUT} \leq 1\text{ A}$ , $V_{IN} \geq 2.4\text{ V}$                         | DRV package                                                                 |      | 0.044 |      | V/A           |
|                                  |                             |                                                                                                   | DBV package                                                                 |      | 0.060 |      |               |
| $\Delta V_{OUT}/\Delta I_{OUT}$  | Load regulation             | $0.1\text{ mA} \leq I_{OUT} \leq 1\text{ A}$ , $V_{IN} \geq 2.4\text{ V}$                         | DYD package                                                                 |      | 0.069 |      | V/A           |
| $I_{GND}$                        | Ground current              | $T_J = 25^{\circ}\text{C}$                                                                        |                                                                             |      | 25    | 31   | $\mu\text{A}$ |
|                                  |                             | $-40^{\circ}\text{C} \leq T_J \leq +85^{\circ}\text{C}$                                           |                                                                             |      |       | 33   |               |
|                                  |                             | $-40^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$                                          |                                                                             |      |       | 40   |               |
| $I_{SHDN}$                       | Shutdown current            | $V_{EN} \leq 0.4\text{ V}$ , $1.45\text{ V} \leq V_{IN} \leq 5.5\text{ V}$                        |                                                                             |      | 0.1   | 1    | $\mu\text{A}$ |
| $I_{CL}$                         | Output current limit        | $V_{IN} = V_{OUT} + V_{DO(MAX)} + 0.25\text{ V}$                                                  | $V_{OUT} = V_{OUT} - 0.2\text{ V}$ , $V_{OUT} \leq 1.5\text{ V}$            | 1.2  | 1.55  | 1.78 | A             |
|                                  |                             |                                                                                                   | $V_{OUT} = 0.9 \times V_{OUT}$ , $1.5\text{ V} < V_{OUT} \leq 4.5\text{ V}$ |      |       |      |               |
| $I_{SC}$                         | Short circuit current limit | $V_{OUT} = 0\text{ V}$ , $V_{IN} = V_{OUT} + V_{DO(MAX)} + 0.25\text{ V}$                         |                                                                             |      | 755   |      | mA            |

## 5.5 Electrical Characteristics (续)

over operating free-air temperature range ( $T_J = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ),  $V_{IN} = V_{OUT} + 0.5\text{ V}$  or  $1.45\text{ V}$  (whichever is greater),  $I_{OUT} = 1\text{ mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$  (unless otherwise noted); all typical values are at  $T_J = 25^{\circ}\text{C}$ .

| PARAMETER        |                                 | TEST CONDITIONS                                                                                   | MIN                                                      | TYP  | MAX  | UNIT                       |
|------------------|---------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------|------|------|----------------------------|
| $V_{DO}$         | Dropout voltage                 | $I_{OUT} = 1\text{ A}$ ,<br>$-40^{\circ}\text{C} \leq T_J \leq +85^{\circ}\text{C}$               | $0.6\text{ V} \leq V_{OUT} < 0.8\text{ V}$               |      | 1350 | 1400                       |
|                  |                                 |                                                                                                   | $0.8\text{ V} \leq V_{OUT} < 1\text{ V}$                 |      | 1200 | 1300                       |
|                  |                                 |                                                                                                   | $0.8\text{ V} \leq V_{OUT} < 1\text{ V}$ , DYD package   |      | 1225 | 1325                       |
|                  |                                 |                                                                                                   | $1\text{ V} \leq V_{OUT} < 1.2\text{ V}$                 |      | 1100 | 1150                       |
|                  |                                 |                                                                                                   | $1\text{ V} \leq V_{OUT} < 1.2\text{ V}$ , DYD package   |      | 1125 | 1175                       |
|                  |                                 |                                                                                                   | $1.2\text{ V} \leq V_{OUT} < 1.5\text{ V}$               |      | 1000 | 1050                       |
|                  |                                 |                                                                                                   | $1.2\text{ V} \leq V_{OUT} < 1.5\text{ V}$ , DYD package |      | 1025 | 1075                       |
|                  |                                 |                                                                                                   | $1.5\text{ V} \leq V_{OUT} < 1.8\text{ V}$               |      | 700  | 800                        |
|                  |                                 |                                                                                                   | $1.5\text{ V} \leq V_{OUT} < 1.8\text{ V}$ , DYD package |      | 725  | 825                        |
|                  |                                 |                                                                                                   | $1.8\text{ V} \leq V_{OUT} < 2.5\text{ V}$               |      | 650  | 750                        |
|                  |                                 |                                                                                                   | $1.8\text{ V} \leq V_{OUT} < 2.5\text{ V}$ , DYD package |      | 650  | 775                        |
|                  |                                 |                                                                                                   | $2.5\text{ V} \leq V_{OUT} < 3.3\text{ V}$               |      | 500  | 600                        |
|                  |                                 |                                                                                                   | $2.5\text{ V} \leq V_{OUT} < 3.3\text{ V}$ , DYD package |      | 525  | 625                        |
|                  |                                 |                                                                                                   | $3.3\text{ V} \leq V_{OUT} < 5.0\text{ V}$               |      | 300  | 425                        |
|                  |                                 |                                                                                                   | $3.3\text{ V} \leq V_{OUT} < 5.0\text{ V}$ , DYD package |      | 300  | 450                        |
|                  |                                 | $I_{OUT} = 1\text{ A}$ ,<br>$-40^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}$              | $0.6\text{ V} \leq V_{OUT} < 0.8\text{ V}$               |      | 1450 | mV                         |
|                  |                                 |                                                                                                   | $0.8\text{ V} \leq V_{OUT} < 1\text{ V}$                 |      | 1350 |                            |
|                  |                                 |                                                                                                   | $0.8\text{ V} \leq V_{OUT} < 1\text{ V}$ , DYD package   |      | 1375 |                            |
|                  |                                 |                                                                                                   | $1\text{ V} \leq V_{OUT} < 1.2\text{ V}$                 |      | 1200 |                            |
|                  |                                 |                                                                                                   | $1\text{ V} \leq V_{OUT} < 1.2\text{ V}$ , DYD package   |      | 1225 |                            |
|                  |                                 |                                                                                                   | $1.2\text{ V} \leq V_{OUT} < 1.5\text{ V}$               |      | 1100 |                            |
|                  |                                 |                                                                                                   | $1.2\text{ V} \leq V_{OUT} < 1.5\text{ V}$ , DYD package |      | 1125 |                            |
|                  |                                 |                                                                                                   | $1.5\text{ V} \leq V_{OUT} < 1.8\text{ V}$               |      | 850  |                            |
|                  |                                 |                                                                                                   | $1.5\text{ V} \leq V_{OUT} < 1.8\text{ V}$ , DYD package |      | 875  |                            |
|                  |                                 |                                                                                                   | $1.8\text{ V} \leq V_{OUT} < 2.5\text{ V}$               |      | 800  |                            |
|                  |                                 |                                                                                                   | $1.8\text{ V} \leq V_{OUT} < 2.5\text{ V}$ , DYD package |      | 825  |                            |
|                  |                                 |                                                                                                   | $2.5\text{ V} \leq V_{OUT} < 3.3\text{ V}$               |      | 650  |                            |
|                  |                                 |                                                                                                   | $2.5\text{ V} \leq V_{OUT} < 3.3\text{ V}$ , DYD package |      | 675  |                            |
|                  |                                 |                                                                                                   | $3.3\text{ V} \leq V_{OUT} < 5.0\text{ V}$               |      | 475  |                            |
|                  |                                 |                                                                                                   | $3.3\text{ V} \leq V_{OUT} < 5.0\text{ V}$ , DYD package |      | 500  |                            |
| PSRR             | Power supply rejection ratio    | $f = 1\text{ kHz}$ , $V_{IN} = V_{OUT} + 1\text{ V}$ , $I_{OUT} = 50\text{ mA}$                   |                                                          | 52   |      | dB                         |
|                  |                                 | $f = 100\text{ kHz}$ , $V_{IN} = V_{OUT} + 1\text{ V}$ , $I_{OUT} = 50\text{ mA}$                 |                                                          | 46   |      |                            |
|                  |                                 | $f = 1\text{ MHz}$ , $V_{IN} = V_{OUT} + 1\text{ V}$ , $I_{OUT} = 50\text{ mA}$                   |                                                          | 52   |      |                            |
| $V_n$            | Output noise voltage            | $\text{BW} = 10\text{ Hz to } 100\text{ kHz}$ , $V_{OUT} = 1.2\text{ V}$ , $I_{OUT} = 1\text{ A}$ |                                                          | 71.5 |      | $\mu\text{V}_{\text{RMS}}$ |
| $V_{UVLO}$       | Undervoltage lockout            | $V_{IN}$ rising                                                                                   | 1.21                                                     | 1.3  | 1.44 | V                          |
| $V_{UVLO, HYST}$ | Undervoltage lockout hysteresis | $V_{IN}$ falling                                                                                  |                                                          | 40   |      | mV                         |
| $t_{STR}$        | Startup time                    |                                                                                                   |                                                          | 550  |      | $\mu\text{s}$              |
| $V_{HI}$         | EN pin high voltage (enabled)   |                                                                                                   | 1                                                        |      |      | V                          |
| $V_{LO}$         | EN pin low voltage (enabled)    |                                                                                                   |                                                          |      | 0.3  | V                          |
| $I_{EN}$         | Enable pin current              | $V_{IN} = 5.5\text{ V}$ , $\text{EN} = 5.5\text{ V}$                                              |                                                          | 10   |      | nA                         |
| $R_{PULLDOWN}$   | Pulldown resistance             | $V_{IN} = 3.3\text{ V}$ (P version only)                                                          |                                                          | 95   |      | $\Omega$                   |

## 5.5 Electrical Characteristics (续)


over operating free-air temperature range ( $T_J = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ),  $V_{IN} = V_{OUT} + 0.5\text{ V}$  or  $1.45\text{ V}$  (whichever is greater),  $I_{OUT} = 1\text{ mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$  (unless otherwise noted); all typical values are at  $T_J = 25^{\circ}\text{C}$ .

| PARAMETER |                  | TEST CONDITIONS                  | MIN | TYP | MAX | UNIT               |
|-----------|------------------|----------------------------------|-----|-----|-----|--------------------|
| $T_{SD}$  | Thermal shutdown | Shutdown, temperature increasing |     | 165 |     | $^{\circ}\text{C}$ |
|           |                  | Reset, temperature decreasing    |     | 155 |     | $^{\circ}\text{C}$ |

(1)  $V_{IN} = 1.45\text{V}$  for  $V_{OUT} < 0.9\text{V}$


## 5.6 Typical Characteristics

at operating temperature  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 0.5\text{V}$  or  $1.45\text{V}$  (whichever is greater),  $I_{OUT} = 1\text{mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\mu\text{F}$  (unless otherwise noted)

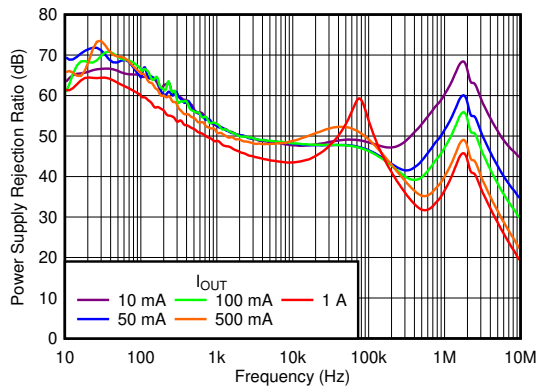


$V_{IN} = 4.3\text{V}$ ,  $V_{OUT} = 3.3\text{V}$ ,  $C_{OUT} = 1\mu\text{F}$

图 5-1. PSRR vs  $I_{OUT}$

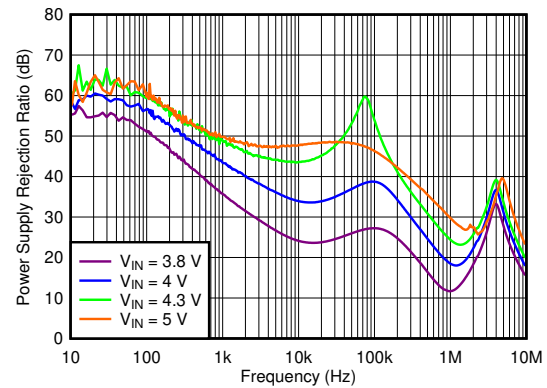


$V_{OUT} = 3.3\text{V}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $I_{OUT} = 1\text{A}$

图 5-2. PSRR vs  $V_{IN}$

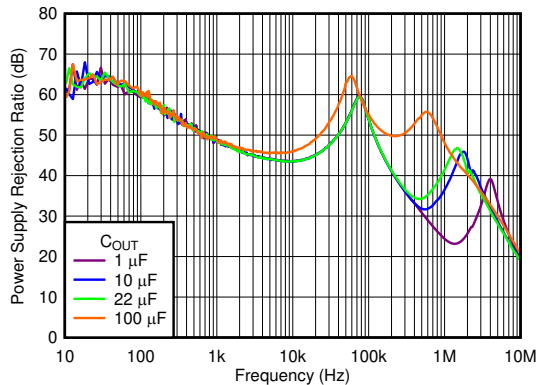


$V_{IN} = 4.3\text{V}$ ,  $V_{OUT} = 3.3\text{V}$ ,  $C_{OUT} = 1\mu\text{F}$

图 5-3. PSRR vs  $C_{OUT}$

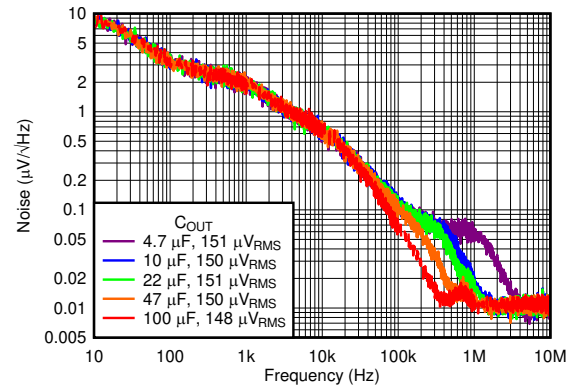


$V_{OUT} = 3.3\text{V}$ ,  $I_{OUT} = 1\text{A}$ ,  $V_{RMS}$  BW = 10Hz to 100kHz

图 5-4. Output Spectral Noise Density

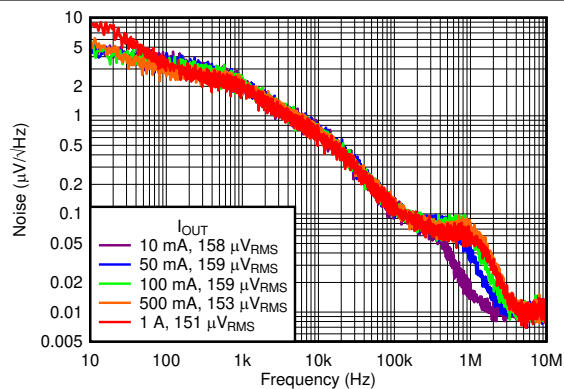

$V_{OUT} = 3.3\text{V}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $V_{RMS}$  BW = 10Hz to 100kHz

图 5-5. Output Spectral Noise Density

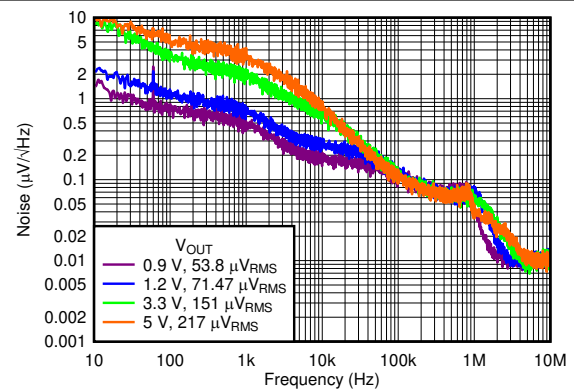


$I_{OUT} = 1\text{A}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $V_{RMS}$  BW = 10Hz to 100kHz

图 5-6. Output Noise vs Frequency and  $V_{OUT}$




## 5.6 Typical Characteristics (continued)

at operating temperature  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 0.5\text{V}$  or  $1.45\text{V}$  (whichever is greater),  $I_{OUT} = 1\text{mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\mu\text{F}$  (unless otherwise noted)

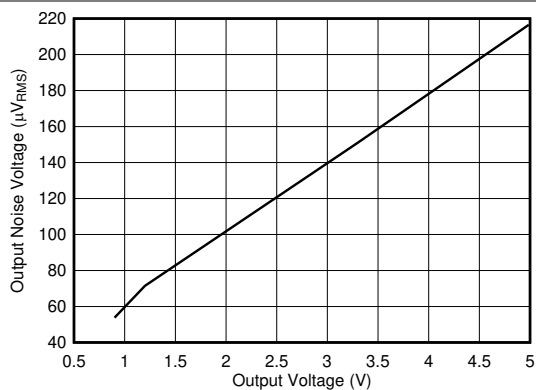


$I_{OUT} = 1\text{A}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $V_{RMS}$  BW = 10Hz to 100kHz

图 5-7. Output Noise Voltage vs  $V_{OUT}$

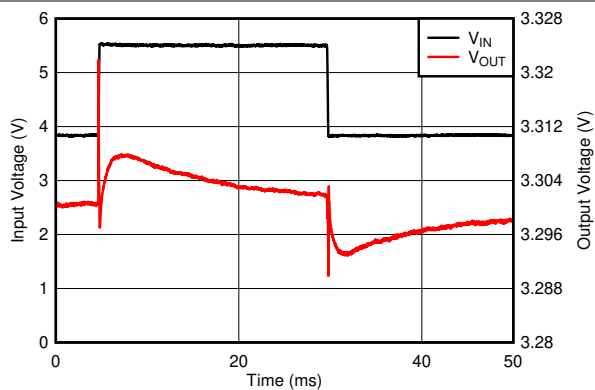

$V_{OUT} = 3.3\text{V}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $V_{IN}$  slew rate =  $1\text{V}/\mu\text{s}$

图 5-8. Line Transient

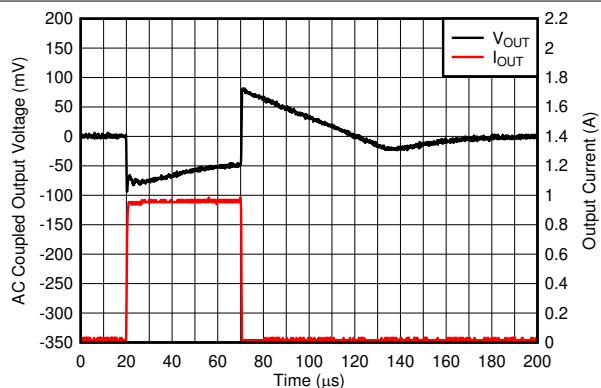

$V_{IN} = 5\text{V}$ ,  $V_{OUT} = 3.3\text{V}$ ,  $C_{OUT} = 1\mu\text{F}$ ,  $I_{OUT}$  slew rate =  $1\text{A}/\mu\text{s}$

图 5-9. 3.3V, 1mA to 1A Load Transient

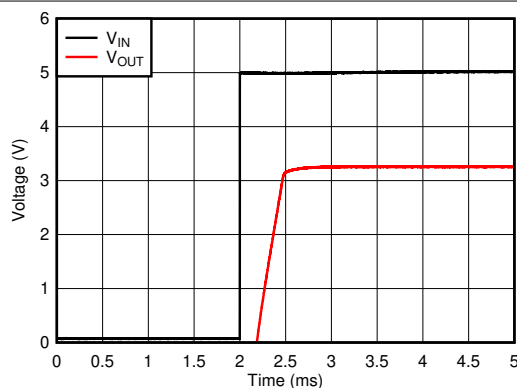


图 5-10.  $V_{IN} = V_{EN}$  Power-Up


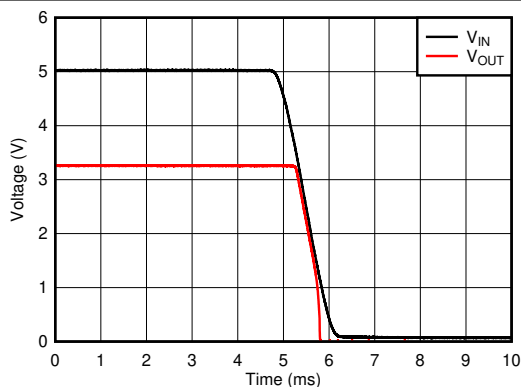


图 5-11.  $V_{IN} = V_{EN}$  Shutdown




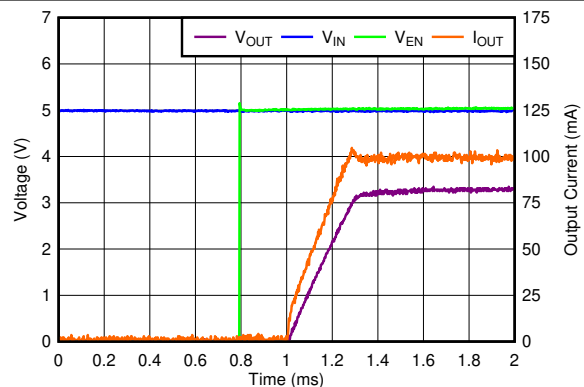


$V_{IN} = 5\text{V}$ ,  $I_{OUT} = 100\text{mA}$ ,  $V_{EN}$  slew rate =  $1\text{V}/\mu\text{s}$ ,  $V_{OUT} = 3.3\text{V}$


图 5-12. EN Start-Up

## 5.6 Typical Characteristics (continued)


at operating temperature  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 0.5\text{V}$  or  $1.45\text{V}$  (whichever is greater),  $I_{OUT} = 1\text{mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\mu\text{F}$  (unless otherwise noted)

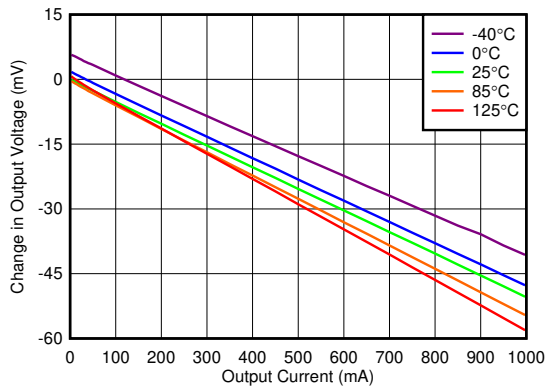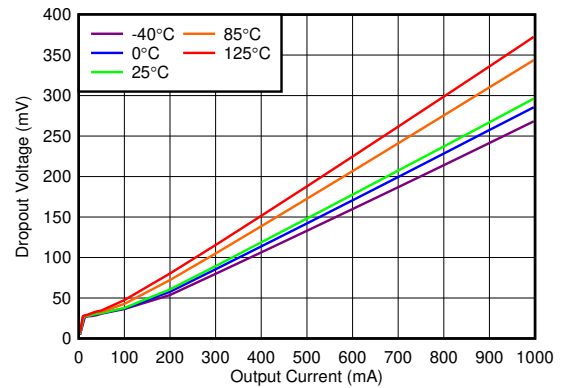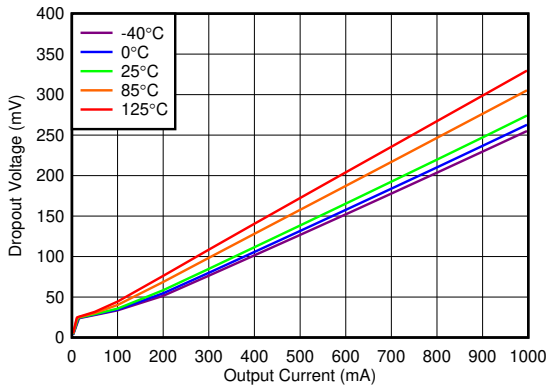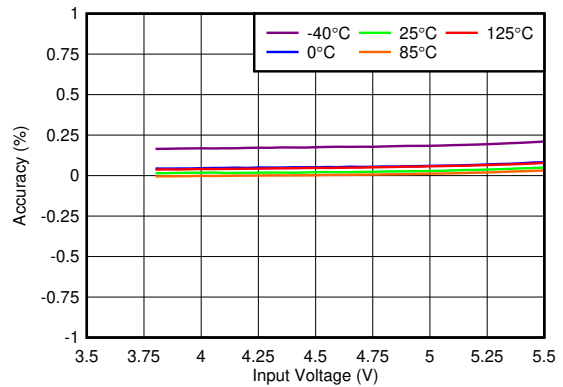图 5-13. Load Regulation vs  $I_{OUT}$ 图 5-14. 3.3V Dropout Voltage vs  $I_{OUT}$ 图 5-15. 5.0V Dropout Voltage vs  $I_{OUT}$ 

$V_{OUT} = 3.3\text{V}$ ,  $I_{OUT} = 1\text{mA}$

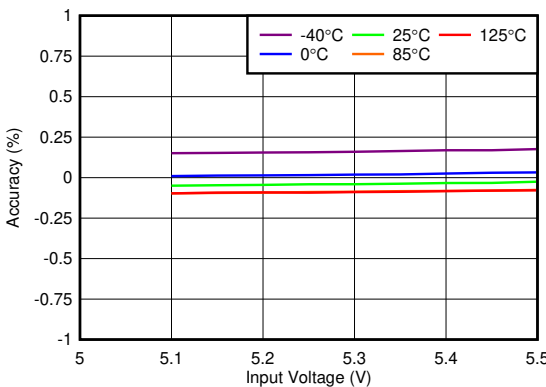
图 5-16. 3.3V Regulation vs  $V_{IN}$  (Line Regulation)

$I_{OUT} = 1\text{mA}$ ,  $V_{OUT} = 5\text{V}$

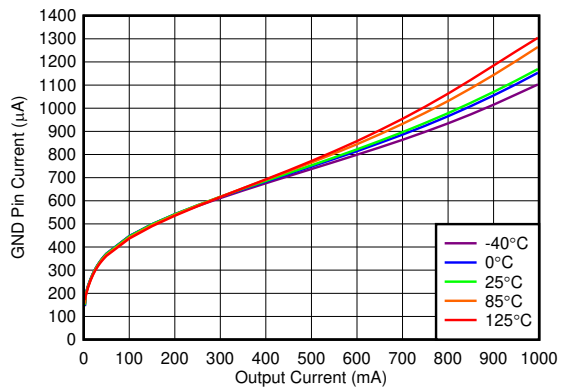图 5-17. 5.0V Accuracy vs  $V_{IN}$  (Line Regulation)图 5-18.  $I_{GND}$  vs  $I_{OUT}$


## 5.6 Typical Characteristics (continued)

at operating temperature  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 0.5\text{V}$  or  $1.45\text{V}$  (whichever is greater),  $I_{OUT} = 1\text{mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\mu\text{F}$  (unless otherwise noted)

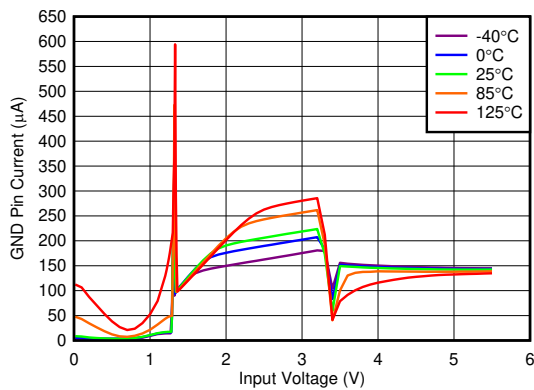

$V_{OUT} = 3.3\text{V}$ ,  $I_{OUT} = 1\text{mA}$

图 5-19.  $I_{GND}$  vs  $V_{IN}$

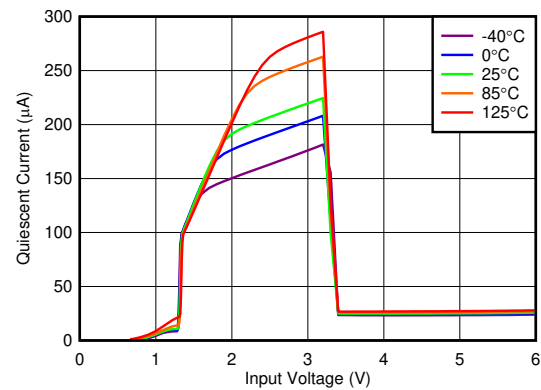

$V_{OUT} = 3.3\text{V}$ ,  $I_{OUT} = 0\text{mA}$

图 5-20.  $I_{GND}$  vs  $V_{IN}$

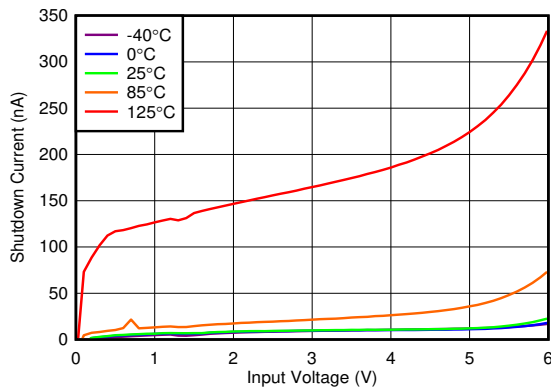


图 5-21.  $I_{SHDN}$  vs  $V_{IN}$

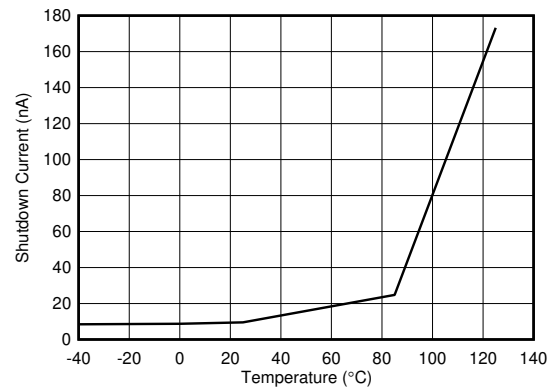


图 5-22.  $I_{SHDN}$  vs Temperature

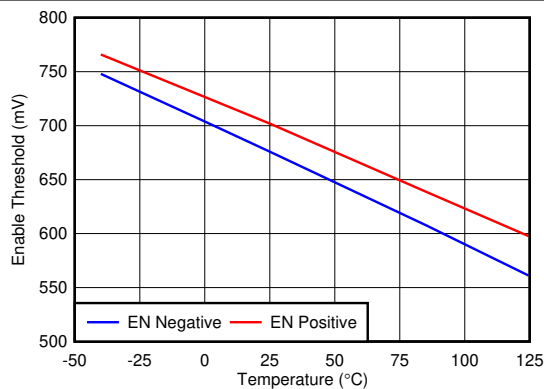


图 5-23. Enable Threshold vs Temperature

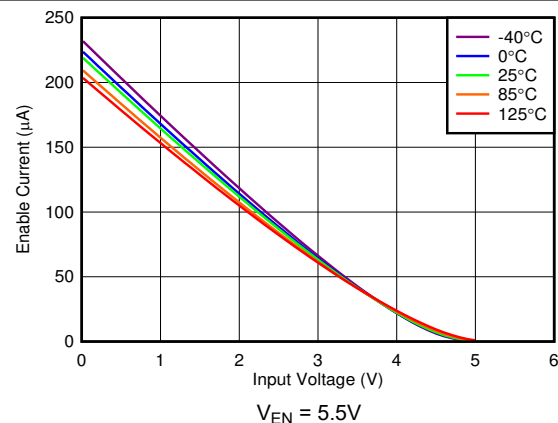


图 5-24.  $I_{EN}$  vs  $V_{IN}$

## 5.6 Typical Characteristics (continued)

at operating temperature  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 0.5\text{V}$  or  $1.45\text{V}$  (whichever is greater),  $I_{OUT} = 1\text{mA}$ ,  $V_{EN} = V_{IN}$ , and  $C_{IN} = C_{OUT} = 1\mu\text{F}$  (unless otherwise noted)

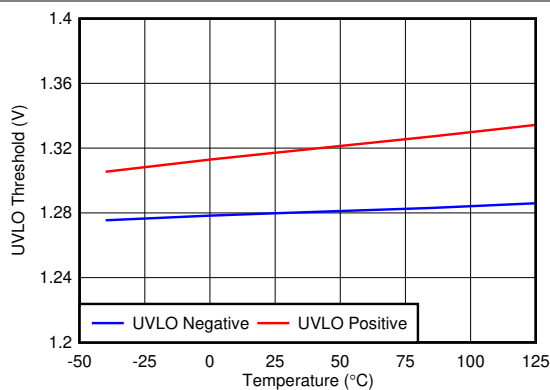


图 5-25. UVLO Threshold vs Temperature

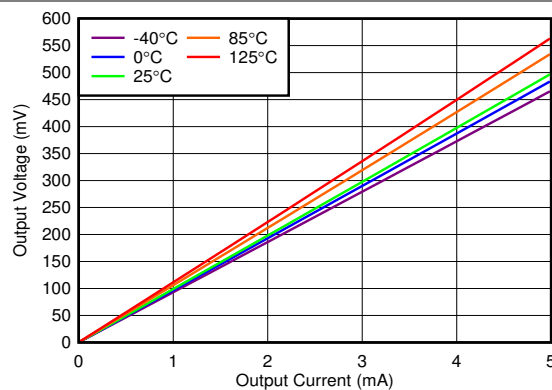


图 5-26.  $I_{OUT}$  vs  $V_{OUT}$  Pulldown Resistor

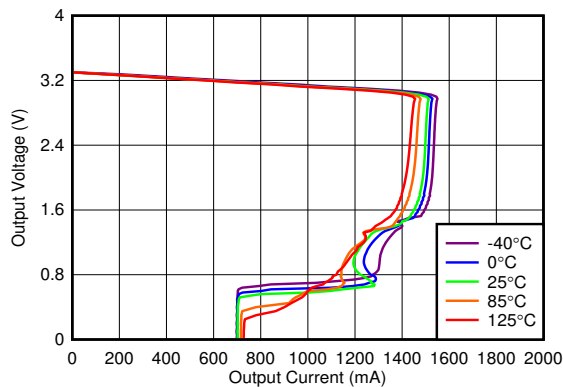


图 5-27. 3.3V Foldback Current Limit vs  $I_{OUT}$


## 6 Detailed Description

### 6.1 Overview

The TLV757P is a next-generation, low-dropout regulator (LDO). This device consumes low quiescent current and delivers excellent line and load transient performance. The TLV757P is optimized for a wide variety of applications by supporting an input voltage range from 1.4V to 5.5V. To minimize cost and solution size, the device is offered in fixed output voltages ranging from 0.6V to 5V. This range supports the lower core voltages of modern microcontrollers (MCUs).

This regulator offers foldback current limit, shutdown, and thermal protection. The operating junction temperature is  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

### 6.2 Functional Block Diagram

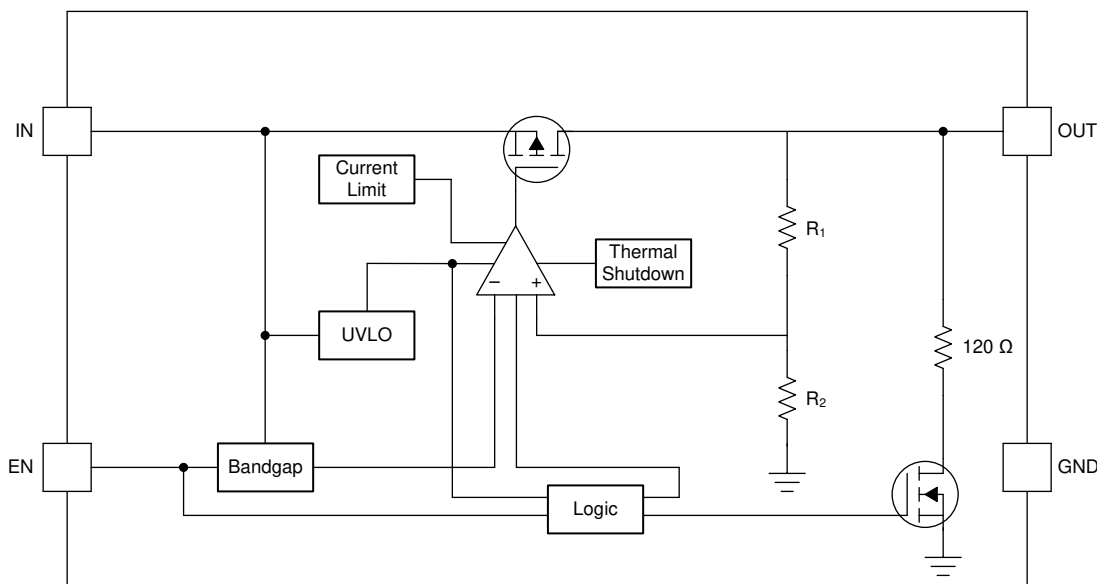

A.  $R_2 = 550\text{k}\Omega$ ,  $R_1 = \text{adjustable}$ .

### 6.3 Feature Description

#### 6.3.1 Undervoltage Lockout (UVLO)

An undervoltage lockout (UVLO) circuit disables the output until the input voltage is greater than the rising UVLO voltage ( $V_{\text{UVLO}}$ ). This circuit makes sure the device does not exhibit unpredictable behavior when the supply voltage is lower than the operational range of the internal circuitry. When  $V_{\text{IN}}$  is less than  $V_{\text{UVLO}}$ , the output is connected to ground with a  $120\Omega$  pulldown resistor.

#### 6.3.2 Enable (EN)

The enable pin (EN) is active high. Enable the device by forcing the EN pin to exceed  $V_{\text{HI}}$ . Turn off the device by forcing the EN pin below  $V_{\text{LO}}$ . If shutdown capability is not required, connect EN to IN.

The device has an internal pull-down that connects a  $120\Omega$  resistor to ground when the device is disabled. The discharge time after disabling depends on the output capacitance ( $C_{\text{OUT}}$ ) and the load resistance ( $R_{\text{L}}$ ) in parallel with the  $120\Omega$  pulldown resistor. 方程式 1 calculates the time constant  $\tau$ :

$$\tau = \frac{120 \cdot R_{\text{L}}}{120 + R_{\text{L}}} \cdot C_{\text{OUT}} \quad (1)$$

The EN pin is independent of the input pin. However, if the EN pin is driven to a higher voltage than  $V_{IN}$ , the current into the EN pin increases. This effect is illustrated in [图 5-24](#). When the EN voltage is higher than the input voltage there is an increased current flow into the EN pin. If this increased flow causes problems in the application, sequence the EN pin after  $V_{IN}$  is high, or tie EN to  $V_{IN}$ . If EN is driven to a higher voltage than  $V_{IN}$ , limit the frequency on EN to below 10kHz.

### 6.3.3 Internal Foldback Current Limit

The TLV757P has an internal current limit that protects the regulator during fault conditions. The current limit is a hybrid scheme with brick wall until the output voltage is less than  $0.4 \times V_{OUT(NOM)}$ . When the voltage drops below  $0.4 \times V_{OUT(NOM)}$ , a foldback current limit is implemented that scales back the current as the output voltage approaches GND. When the output shorts, the LDO supplies a typical current of  $I_{SC}$ . The output voltage is not regulated when the device is in current limit. In this condition, the output voltage is the product of the regulated current and the load resistance. When the device output is shorts, the PMOS pass transistor dissipates power  $[(V_{IN} - V_{OUT}) \times I_{SC}]$  until thermal shutdown is triggered and the device turns off. After the device cools down, the internal thermal shutdown circuit turns the device back on. If the fault condition continues, the device cycles between current limit and thermal shutdown.

The foldback current-limit circuit limits the current that is allowed through the device to current levels lower than the minimum current limit at nominal  $V_{OUT}$  current limit ( $I_{CL}$ ) during start up. See [图 5-27](#) for typical current limit values. If the output is loaded by a constant-current load during start up, or if the output voltage is negative when the device is enabled, then the load current demanded by the load potentially exceeds the foldback current limit. Thus, causing the device to possibly not rise to the full output voltage. For constant-current loads, disable the output load until the output rises to the nominal voltage.

Excess inductance causes the current limit to oscillate. Minimize the inductance to keep the current limit from oscillating during a fault condition.

### 6.3.4 Thermal Shutdown

Thermal shutdown protection disables the output when the junction temperature rises to approximately 165°C. Disabling the device eliminates the power dissipated by the device, allowing the device to cool. When the junction temperature cools to approximately 155°C, the output circuitry is enabled again. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit cycles on and off. This cycling limits regulator dissipation, which protects the circuit from damage as a result of overheating.

Activating the thermal shutdown feature usually indicates excessive power dissipation as a result of the product of the  $(V_{IN} - V_{OUT})$  voltage and the load current. For reliable operation, limit junction temperature to a maximum of 125°C. To estimate the margin of safety in a complete design, increase the ambient temperature until the thermal protection is triggered; use worst-case loads and signal conditions.

The internal protection circuitry protects against overload conditions but is not intended to be activated in normal operation. Continuously running the device into thermal shutdown degrades device reliability.

## 6.4 Device Functional Modes

表 6-1 lists a comparison between the normal, dropout, and disabled modes of operation.

**表 6-1. Device Functional Modes Comparison**

| OPERATING MODE          | PARAMETER                        |                   |                    |                |
|-------------------------|----------------------------------|-------------------|--------------------|----------------|
|                         | $V_{IN}$                         | EN                | $I_{OUT}$          | $T_J$          |
| Normal <sup>(1)</sup>   | $V_{IN} > V_{OUT(NOM)} + V_{DO}$ | $V_{EN} > V_{HI}$ | $I_{OUT} < I_{CL}$ | $T_J < T_{SD}$ |
| Dropout <sup>(1)</sup>  | $V_{IN} < V_{OUT(NOM)} + V_{DO}$ | $V_{EN} > V_{HI}$ | —                  | $T_J < T_{SD}$ |
| Disabled <sup>(2)</sup> | $V_{IN} < V_{UVLO}$              | $V_{EN} < V_{LO}$ | —                  | $T_J > T_{SD}$ |

(1) Make sure all table conditions are met.

(2) The device is disabled when any condition is met.

### 6.4.1 Normal Operation

The device regulates to the nominal output voltage when all of the following conditions are met.

- The input voltage is greater than the nominal output voltage plus the dropout voltage ( $V_{OUT(NOM)} + V_{DO}$ )
- The enable voltage has previously exceeded the enable rising threshold voltage and has not decreased below the enable falling threshold
- The output current is less than the current limit ( $I_{OUT} < I_{CL}$ )
- The device junction temperature is less than the thermal shutdown temperature ( $T_J < T_{SD}$ )

### 6.4.2 Dropout Operation

If the input voltage is lower than the nominal output voltage plus the specified dropout voltage, but all other conditions are met for normal operation, the device operates in dropout. In this mode, the output voltage tracks the input voltage. During this mode, the transient performance of the device degrades because the pass transistor is in a triode state and no longer controls the output voltage of the LDO. Line or load transients in dropout result in large output-voltage deviations.

When the device is in a steady dropout state (defined as when the device is in dropout,  $V_{IN} < V_{OUT(NOM)} + V_{DO}$ , right after being in a normal regulation state, but not during start-up), the pass transistor is driven as hard as possible when the control loop is out of balance. During the normal time required for the device to regain regulation,  $V_{IN} \geq V_{OUT(NOM)} + V_{DO}$ ,  $V_{OUT}$  overshoots  $V_{OUT(NOM)}$  during fast transients.

### 6.4.3 Disabled

The output is shut down by forcing the enable pin below  $V_{LO}$ . When disabled, the pass transistor is turned off, internal circuits are shut down, and the output voltage is actively discharged to ground by an internal switch from the output to ground. The active pulldown is on when sufficient input voltage is provided.

## 7 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 7.1 Application Information

#### 7.1.1 Input and Output Capacitor Selection

The TLV757P requires an output capacitance of 0.47  $\mu$ F or larger for stability. Use X5R- and X7R-type ceramic capacitors because these capacitors have minimal variation in capacitance value and equivalent series resistance (ESR) over temperature. When selecting a capacitor for a specific application, consider the DC bias characteristics for the capacitor. Higher output voltages cause a significant derating of the capacitor. As a general rule, make sure ceramic capacitors are derated by 50%. For best performance, use an output capacitance value no greater than 200 $\mu$ F.

Place a 1 $\mu$ F or greater capacitor on the input pin of the LDO. Some input supplies have a high impedance. Placing a capacitor on the input supply reduces the input impedance. The input capacitor counteracts reactive input sources and improves transient response and PSRR. If the input supply has high impedance over a large range of frequencies, use several input capacitors in parallel to lower the impedance over frequency. Use a higher-value capacitor if large, fast, rise-time load transients are expected, or if the device is located several inches from the input power source.

#### 7.1.2 Dropout Voltage

The TLV757P uses a PMOS pass transistor to achieve low dropout. When ( $V_{IN} - V_{OUT}$ ) is less than the dropout voltage ( $V_{DO}$ ), the PMOS pass transistor is in the linear region of operation and the input-to-output resistance is the  $R_{DS(ON)}$  of the PMOS pass transistor.  $V_{DO}$  scales linearly with the output current because the PMOS transistor functions like a resistor in dropout mode. As with any linear regulator, PSRR and transient response degrade as ( $V_{IN} - V_{OUT}$ ) approaches dropout operation. See [图 5-14](#) and [图 5-15](#) for typical dropout values.

#### 7.1.3 Exiting Dropout

Some applications have transients that place the LDO into dropout, such as slower ramps on  $V_{IN}$  during start-up. As with other LDOs, the output overshoots on recovery from these conditions. A ramping input supply causes an LDO to overshoot on start-up when the slew rate and voltage levels are in the correct range; see [图 7-1](#). Use an enable signal to avoid this condition.



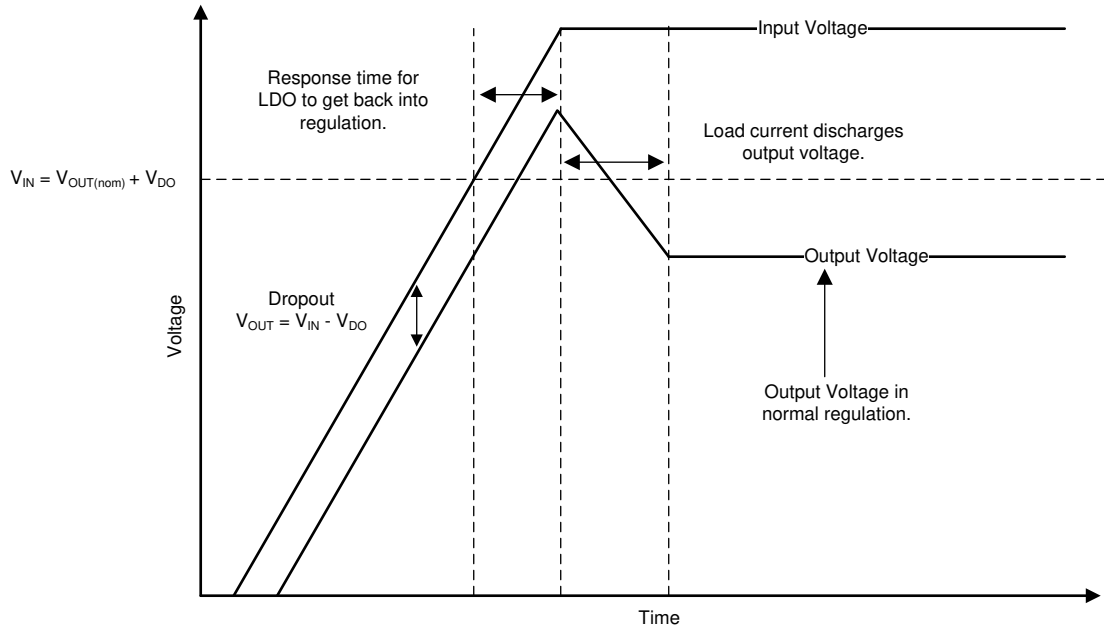


图 7-1. Start-Up Into Dropout

Line transients out of dropout also cause overshoot on the output of the regulator. These overshoots are caused by the error amplifier having to drive the gate capacitance of the pass transistor and bring the gate back to the correct voltage for proper regulation. 图 7-2 illustrates what is happening internally with the gate voltage and how overshoot is caused during operation. When the LDO is placed in dropout, the gate voltage (VGS) is pulled all the way down to give the pass transistor the lowest on-resistance as possible. However, if a line transient occurs when the device is in dropout, the loop is not in regulation, which causes the output to overshoot until the loop responds and the output current pulls the output voltage back down into regulation. If these transients are not acceptable, then continue to add input capacitance in the system until the transient is slow enough to reduce the overshoot.

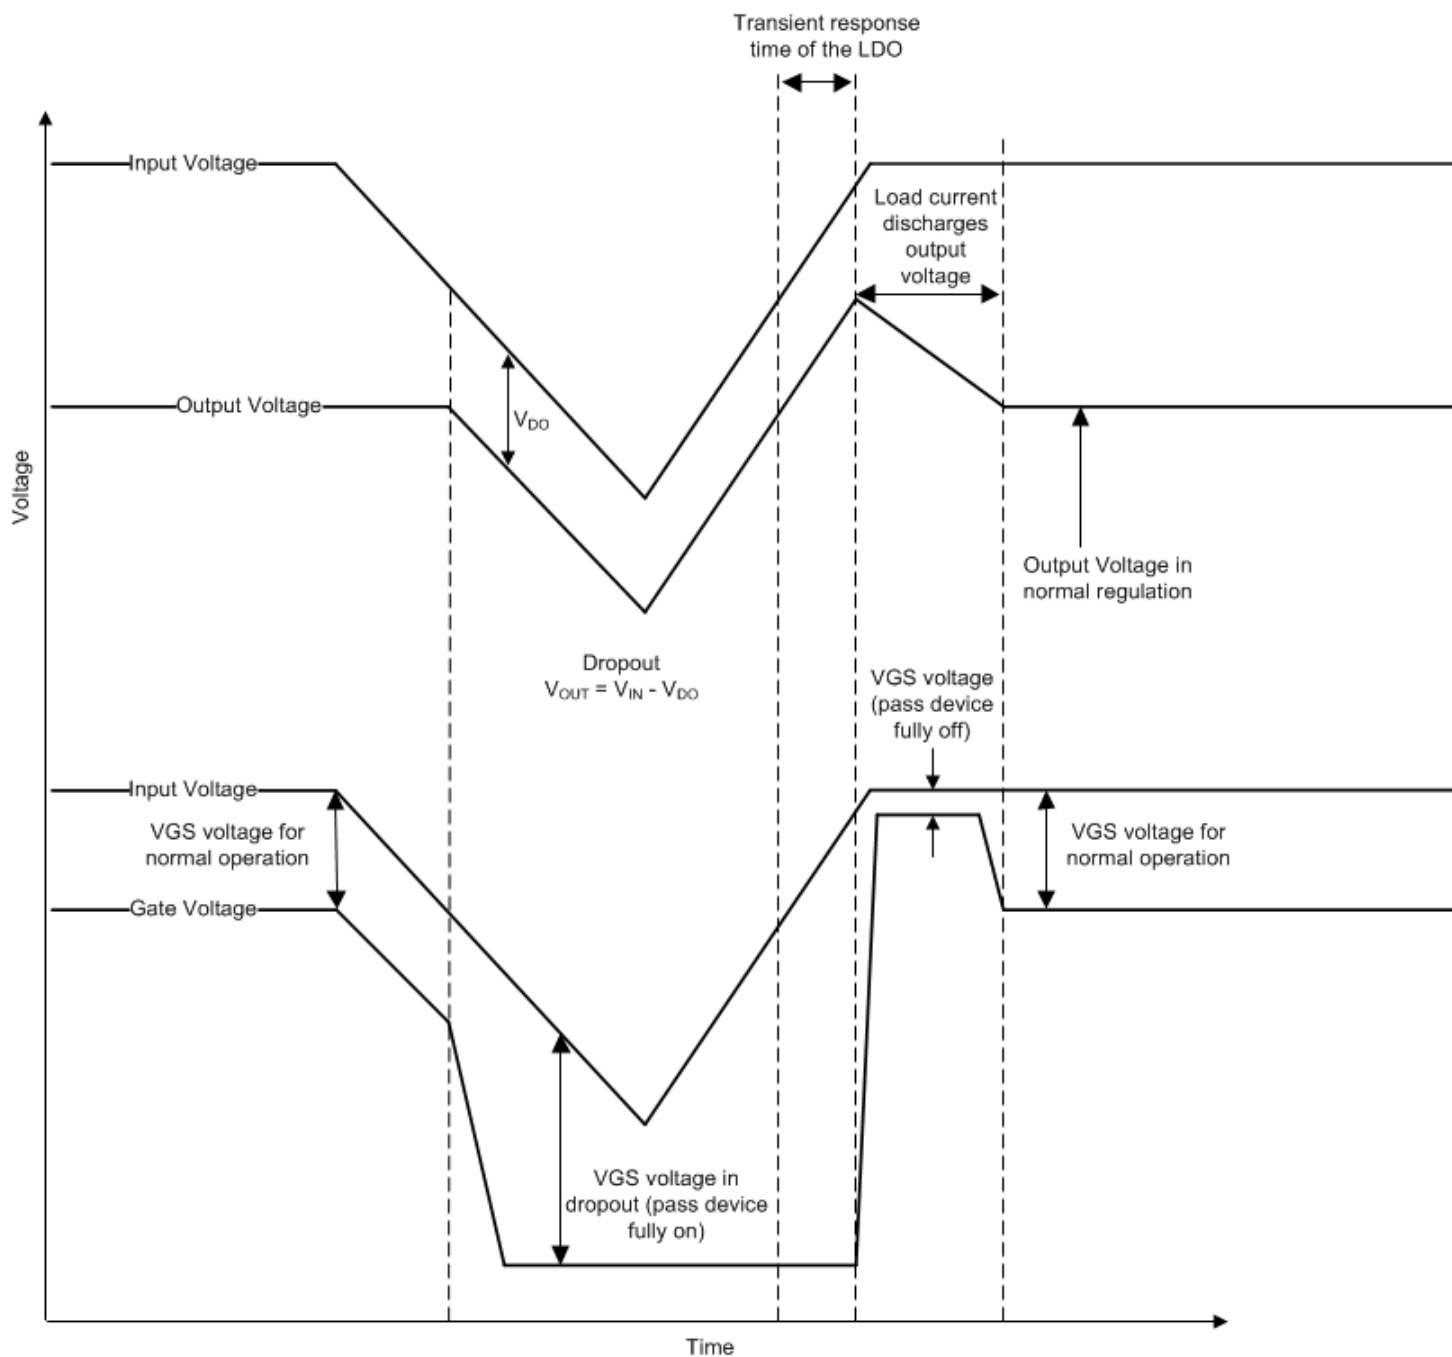


图 7-2. Line Transients From Dropout

### 7.1.4 Reverse Current

As with most LDOs, excessive reverse current potentially damages this device.

Reverse current flows through the body diode on the pass transistor instead of the normal conducting channel. At high magnitudes, this current flow degrades the long-term reliability of the device, as a result of one of the following conditions:

- Degradation caused by electromigration
- Excessive heat dissipation
- Potential for a latch-up condition

Conditions where reverse current occurs are outlined in this section, all of which exceed the absolute maximum rating of  $V_{OUT} > V_{IN} + 0.3V$ :

- If the device has a large  $C_{OUT}$  and the input supply collapses with little or no load current
- The output is biased when the input supply is not established
- The output is biased above the input supply

If reverse current flow is expected in the application, use external protection to protect the device. 图 7-3 shows one approach of protecting the device.

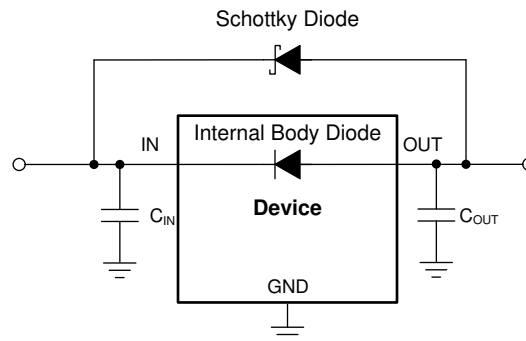


图 7-3. Example Circuit for Reverse Current Protection Using a Schottky Diode

### 7.1.5 Power Dissipation ( $P_D$ )

Circuit reliability demands that proper consideration is given to device power dissipation, location of the circuit on the printed circuit board (PCB), and correct sizing of the thermal plane. Make sure the PCB area around the regulator is as free of other heat-generating devices as possible that cause added thermal stresses.

As a first-order approximation, power dissipation in the regulator depends on the input-to-output voltage difference and load conditions. Use 方程式 2 to approximate  $P_D$ :

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} \quad (2)$$

Minimize power dissipation to achieve greater efficiency. This minimizing process is achieved by selecting the correct system voltage rails. Proper selection helps obtain the minimum input-to-output voltage differential. The low dropout of the device allows for maximum efficiency across a wide range of output voltages.

The main heat conduction path for the device is through the thermal pad on the package. As such, solder the thermal pad to a copper pad area under the device. Make sure this pad area contains an array of plated vias that conduct heat to inner plane areas or to a bottom-side copper plane.

The maximum allowable junction temperature ( $T_J$ ) determines the maximum power dissipation for the device. Power dissipation and junction temperature are most often related by the junction-to-ambient thermal resistance ( $R_{\theta JA}$ ) of the combined PCB, device package, and the temperature of the ambient air ( $T_A$ ), according to 方程式 3.

$$T_J = T_A + R_{\theta JA} \times P_D$$

(3)

Unfortunately, this thermal resistance ( $R_{\theta JA}$ ) is dependent on the heat-spreading capability built into the particular PCB design, and therefore varies according to the total copper area, copper weight, and location of the planes. The  $R_{\theta JA}$  value is only used as a relative measure of package thermal performance.  $R_{\theta JA}$  is the sum of the WSON package junction-to-case (bottom) thermal resistance ( $R_{\theta JCbot}$ ) plus the thermal resistance contribution by the PCB copper.

7.1.5.1 Estimating Junction Temperature

The JEDEC standard recommends the use of psi ( $\Psi$ ) thermal metrics to estimate the junction temperatures of the LDO when in-circuit on a typical PCB board application. These metrics are not thermal resistances, but offer practical and relative means of estimating junction temperatures. These psi metrics are independent of the copper-spreading area. The key thermal metrics ( $\Psi_{JT}$  and  $\Psi_{JB}$ ) are shown in the *Thermal Information* table and are used in accordance with 方程式 4.

$$\Psi_{JT}: T_J = T_T + \Psi_{JT} \times P_D$$
$$\Psi_{JB}: T_J = T_B + \Psi_{JB} \times P_D$$

(4)

where:

- $P_D$  is the power dissipated as shown in 方程式 2
- $T_T$  is the temperature at the center-top of the device package
- $T_B$  is the PCB surface temperature measured 1mm from the device package and centered on the package edge

7.2 Typical Application

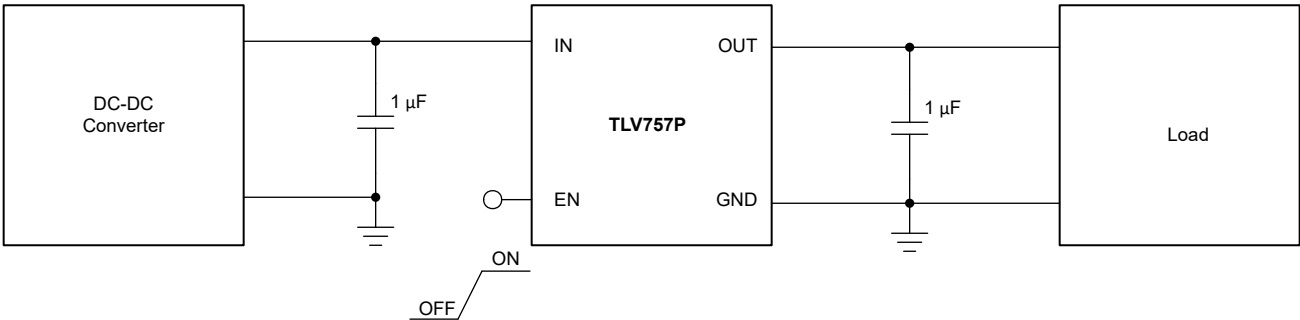


图 7-4. TLV757P Typical Application

7.2.1 Design Requirements

表 7-1 lists the design requirements for this application.

表 7-1. Design Parameters

| PARAMETER                   | DESIGN REQUIREMENT |
|-----------------------------|--------------------|
| Input voltage               | 2.5V               |
| Output voltage              | 1.8V               |
| Input current               | 700mA (maximum)    |
| Output load                 | 600mA DC           |
| Maximum ambient temperature | 70°C               |

## 7.2.2 Detailed Design Procedure

### 7.2.2.1 Input Current

During normal operation, the input current to the LDO is approximately equal to the output current of the LDO. During start-up, the input current is higher as a result of the inrush current charging the output capacitor. Use 方程式 5 to calculate the current through the input.

$$I_{OUT(t)} = \left[ \frac{C_{OUT} \times dV_{OUT(t)}}{dt} \right] + \left[ \frac{V_{OUT(t)}}{R_{LOAD}} \right] \quad (5)$$

where:

- $V_{OUT(t)}$  is the instantaneous output voltage of the turn-on ramp
- $dV_{OUT(t)} / dt$  is the slope of the  $V_{OUT}$  ramp
- $R_{LOAD}$  is the resistive load impedance

### 7.2.2.2 Thermal Dissipation

Junction temperature is determined using the junction-to-ambient thermal resistance ( $R_{\theta JA}$ ) and the total power dissipation ( $P_D$ ). Use 方程式 6 to calculate the power dissipation. Multiply  $P_D$  by  $R_{\theta JA}$  and add the ambient temperature ( $T_A$ ) to calculate the junction temperature ( $T_J$ ) as 方程式 7 shows.

$$P_D = (I_{GND} + I_{OUT}) \times (V_{IN} - V_{OUT}) \quad (6)$$


$$T_J = R_{\theta JA} \times P_D + T_A \quad (7)$$

If the ( $T_{J(MAX)}$ ) value does not exceed 125°C, calculate the maximum ambient temperature as 方程式 8 shows. 方程式 9 calculates the maximum ambient temperature with a value of 82.916°C.

$$T_{A(MAX)} = T_{J(MAX)} - R_{\theta JA} \times P_D \quad (8)$$

$$T_{A(MAX)} = 125^\circ\text{C} - 100.2 \times (2.5\text{V} - 1.8\text{V}) \times (0.6\text{A}) = 82.916^\circ\text{C} \quad (9)$$

## 7.2.3 Application Curves

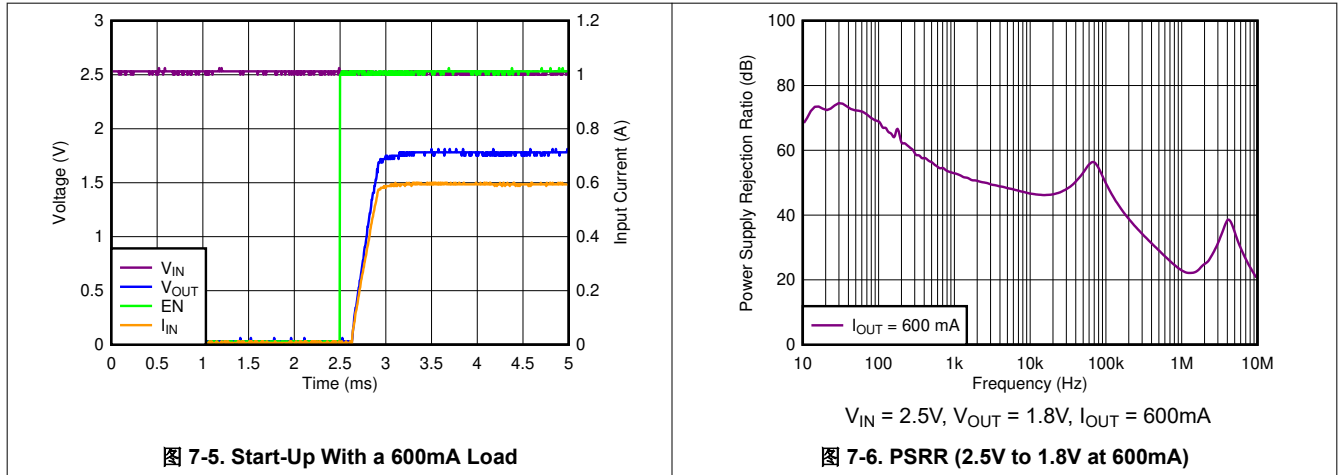

## 7.3 Power Supply Recommendations

Connect a low output impedance power supply directly to the IN pin of the TLV757P. If the input source is reactive, use multiple input capacitors in parallel with the 1μF input capacitor to lower the input supply impedance over frequency.

## 7.4 Layout

### 7.4.1 Layout Guidelines

- Place input and output capacitors as close as possible to the device.
- Use copper planes for device connections to optimize thermal performance.
- Place thermal vias around the device to distribute the heat.
- For packages with thermal pads, solder the thermal pad to copper to achieve best thermal resistance. Thermal resistance increases significantly when the thermal pad is not soldered.

### 7.4.2 Layout Examples

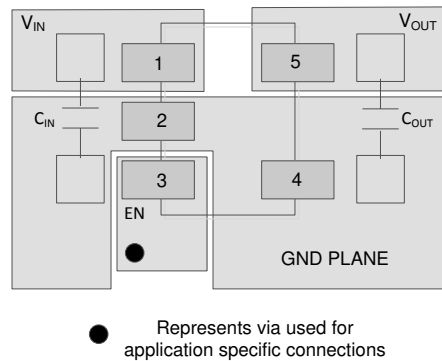


图 7-7. Layout Example: DBV Package

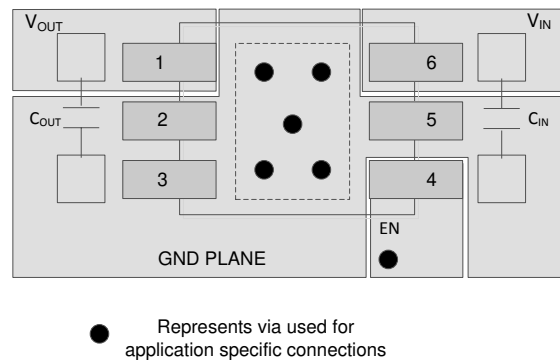


图 7-8. Layout Example: DRV Package

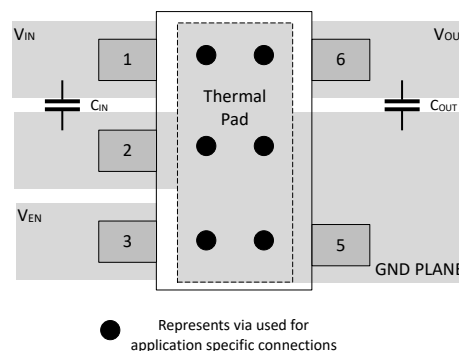


图 7-9. Layout Example: DYD Package

## 8 Device and Documentation Support

### 8.1 Device Support

#### 8.1.1 Device Nomenclature

表 8-1. Device Nomenclature<sup>(1)(2)</sup>

| PRODUCT          | V <sub>OUT</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TLV757xx(x)Pyxyz | <p><b>xx(x)</b> is the nominal output voltage. For output voltages with a resolution of 50mV, two digits are used in the ordering number; otherwise, three digits are used (for example, 28 = 2.8V; 125 = 1.25V).</p> <p><b>P</b> indicates an active output discharge feature. All members of the TLV757P family actively discharge the output when the device is disabled.</p> <p><b>yyy</b> is the package designator.</p> <p><b>z</b> is the package quantity. R is for reel (3000 pieces), T is for tape (250 pieces).</p> |

- (1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or visit the device product folder on [www.ti.com](http://www.ti.com).
- (2) Output voltages from 0.6V to 5V in 50mV increments are available. Contact the factory for details and availability.

### 8.2 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](http://ti.com) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 8.3 支持资源

**TI E2E™ 中文支持论坛**是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的[使用条款](#)。

### 8.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 8.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 8.6 术语表

**TI 术语表**      本术语表列出并解释了术语、首字母缩略词和定义。

## 9 Revision History

注：以前版本的页码可能与当前版本的页码不同

| Changes from Revision B (December 2023) to Revision C (March 2024) | Page               |
|--------------------------------------------------------------------|--------------------|
| • 将 DYC 封装从 <i>预发布</i> 更改为 <i>量产数据</i> .....                       | <a href="#">1</a>  |
| • 向 <i>特性</i> 部分添加了 SOT-23 (DYD) 封装要点.....                         | <a href="#">1</a>  |
| • Added last bullet item to <i>Layout Guidelines</i> section.....  | <a href="#">22</a> |
| • Added <i>Layout Example: DYD Package</i> figure.....             | <a href="#">22</a> |

| Changes from Revision A (December 2017) to Revision B (December 2023) | Page |
|-----------------------------------------------------------------------|------|
| • 将 DBV 封装从 预发布 更改为 量产数据 ( 正在供货 ) .....                               | 1    |
| • 添加了 DYD 封装为预发布状态.....                                               | 1    |
| • 添加了指向 应用 部分的链接.....                                                 | 1    |
| • 向 说明 部分添加了封装说明.....                                                 | 1    |

**10 Mechanical, Packaging, and Orderable Information**

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



**PACKAGING INFORMATION**

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TLV75709PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1H8F                |
| TLV75709PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1H8F                |
| <a href="#">TLV75709PDRVR</a> | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HGH                |
| TLV75709PDRVR.A               | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HGH                |
| <a href="#">TLV75710PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1FEF                |
| TLV75710PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 1FEF                |
| <a href="#">TLV75710PDRVR</a> | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HHH                |
| TLV75710PDRVR.A               | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HHH                |
| <a href="#">TLV75712PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1FFF                |
| TLV75712PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 1FFF                |
| <a href="#">TLV75712PDRVR</a> | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HHI                |
| TLV75712PDRVR.A               | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HHI                |
| <a href="#">TLV75712PDYDR</a> | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DVH                |
| TLV75712PDYDR.A               | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DVH                |
| <a href="#">TLV75715PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1FGF                |
| TLV75715PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1FGF                |
| <a href="#">TLV75715PDRVR</a> | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HJH                |
| TLV75715PDRVR.A               | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HJH                |
| TLV75715PDRVRG4               | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HJH                |
| TLV75715PDRVRG4.A             | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HJH                |
| <a href="#">TLV75718PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1FHF                |
| TLV75718PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1FHF                |
| <a href="#">TLV75718PDRVR</a> | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HKH                |
| TLV75718PDRVR.A               | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HKH                |
| <a href="#">TLV75718PDYDR</a> | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DWH                |
| TLV75718PDYDR.A               | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DWH                |
| <a href="#">TLV75719PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1H7F                |
| TLV75719PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1H7F                |
| <a href="#">TLV75719PDRVR</a> | Active        | Production           | WSON (DRV)   6   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HLH                |

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TLV75719PDRVR.A               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HLH                |
| <a href="#">TLV75725PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1FIF                |
| TLV75725PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1FIF                |
| TLV75725PDBVRG4               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1FIF                |
| TLV75725PDBVRG4.A             | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1FIF                |
| <a href="#">TLV75725PDRVR</a> | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HMH                |
| TLV75725PDRVR.A               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HMH                |
| <a href="#">TLV75725PDYDR</a> | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DXH                |
| TLV75725PDYDR.A               | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DXH                |
| <a href="#">TLV75728PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1FJF                |
| TLV75728PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1FJF                |
| <a href="#">TLV75728PDRVR</a> | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HNNH               |
| TLV75728PDRVR.A               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HNNH               |
| TLV75728PDRVRG4               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HNNH               |
| TLV75728PDRVRG4.A             | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HNNH               |
| <a href="#">TLV75728PDYDR</a> | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DZH                |
| TLV75728PDYDR.A               | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3DZH                |
| <a href="#">TLV75729PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1H9F                |
| TLV75729PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 1H9F                |
| <a href="#">TLV75730PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1GHF                |
| TLV75730PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1GHF                |
| <a href="#">TLV75730PDRVR</a> | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HOH                |
| TLV75730PDRVR.A               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HOH                |
| TLV75730PDRVRG4               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HOH                |
| TLV75730PDRVRG4.A             | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HOH                |
| <a href="#">TLV75730PDYDR</a> | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3E1H                |
| TLV75730PDYDR.A               | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3E1H                |
| <a href="#">TLV75733PDBVR</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | 1FKF                |
| TLV75733PDBVR.A               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1FKF                |
| <a href="#">TLV75733PDRVR</a> | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HPH                |
| TLV75733PDRVR.A               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HPH                |

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TLV75733PDRVRG4               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HPH                |
| TLV75733PDRVRG4.A             | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HPH                |
| <a href="#">TLV75733PDYDR</a> | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3E2H                |
| TLV75733PDYDR.A               | Active        | Production           | SOT-23 (DYD)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 3E2H                |
| <a href="#">TLV75740PDRVR</a> | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HQH                |
| TLV75740PDRVR.A               | Active        | Production           | WSO (DRV)   6    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1HQH                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

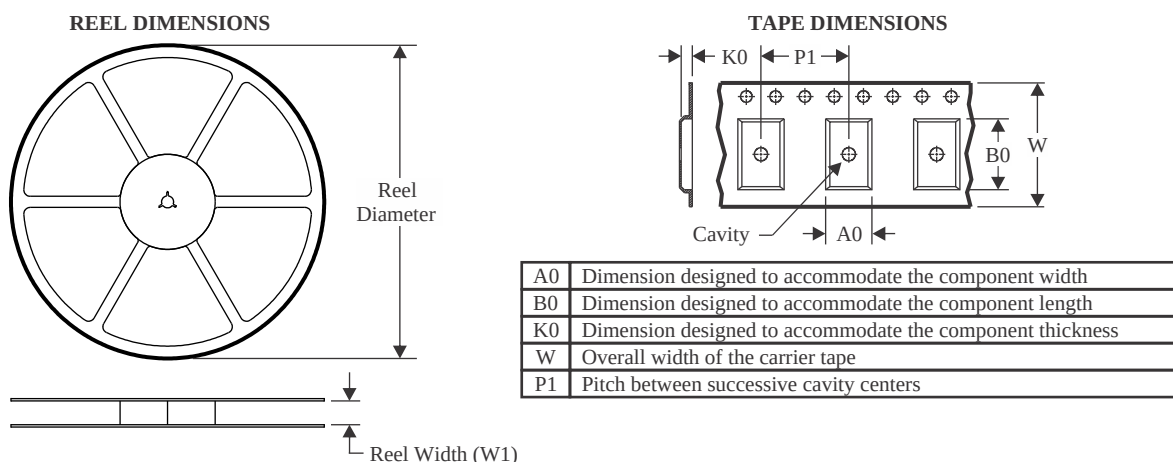

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

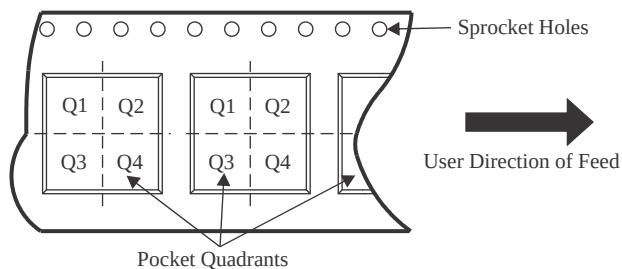


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV75709PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75709PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75710PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75710PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75712PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75712PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75712PDYDR   | SOT-23       | DYD             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75715PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75715PDRVR   | WSO          | DRV             | 6    | 3000 | 178.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75715PDRVRG4 | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75718PDBVR   | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75718PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75718PDYDR   | SOT-23       | DYD             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75719PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75719PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV75719PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75725PDBVR   | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75725PDBVRG4 | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75725PDRVR   | WSO          | DRV             | 6    | 3000 | 178.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75725PDYDR   | SOT-23       | DYD             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75728PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75728PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75728PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75728PDRVRG4 | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75728PDYDR   | SOT-23       | DYD             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75729PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75729PDBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75730PDBVR   | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75730PDRVR   | WSO          | DRV             | 6    | 3000 | 178.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75730PDRVRG4 | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75730PDYDR   | SOT-23       | DYD             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75733PDBVR   | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75733PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75733PDRVRG4 | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |
| TLV75733PDYDR   | SOT-23       | DYD             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV75740PDRVR   | WSO          | DRV             | 6    | 3000 | 180.0              | 8.4                | 2.3     | 2.3     | 1.15    | 4.0     | 8.0    | Q2            |


## TAPE AND REEL BOX DIMENSIONS

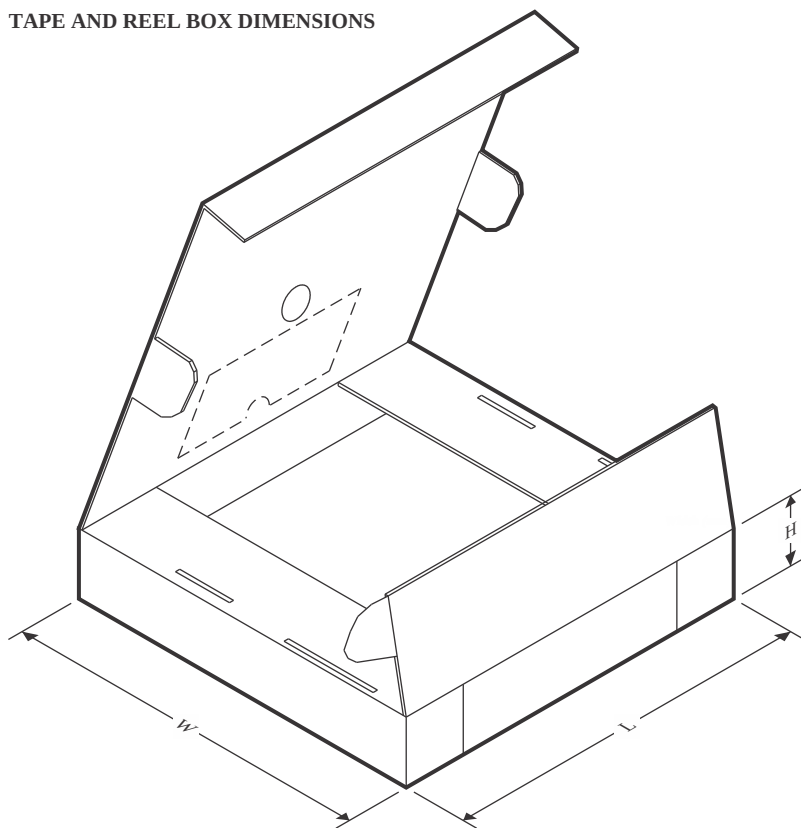

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV75709PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75709PDRVR   | WSO          | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75710PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75710PDRVR   | WSO          | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75712PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75712PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75712PDRVR   | WSO          | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75712PDYDR   | SOT-23       | DYD             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75715PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75715PDRVR   | WSO          | DRV             | 6    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV75715PDRVRG4 | WSO          | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75718PDBVR   | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV75718PDRVR   | WSO          | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75718PDYDR   | SOT-23       | DYD             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75719PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75719PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75719PDRVR   | WSO          | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75725PDBVR   | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV75725PDBVRG4 | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75725PDRVR   | WSON         | DRV             | 6    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV75725PDYDR   | SOT-23       | DYD             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75728PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75728PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75728PDRVR   | WSON         | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75728PDRVRG4 | WSON         | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75728PDYDR   | SOT-23       | DYD             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75729PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75729PDBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75730PDBVR   | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV75730PDRVR   | WSON         | DRV             | 6    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV75730PDRVRG4 | WSON         | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75730PDYDR   | SOT-23       | DYD             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75733PDBVR   | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV75733PDRVR   | WSON         | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75733PDRVRG4 | WSON         | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75733PDYDR   | SOT-23       | DYD             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV75740PDRVR   | WSON         | DRV             | 6    | 3000 | 210.0       | 185.0      | 35.0        |

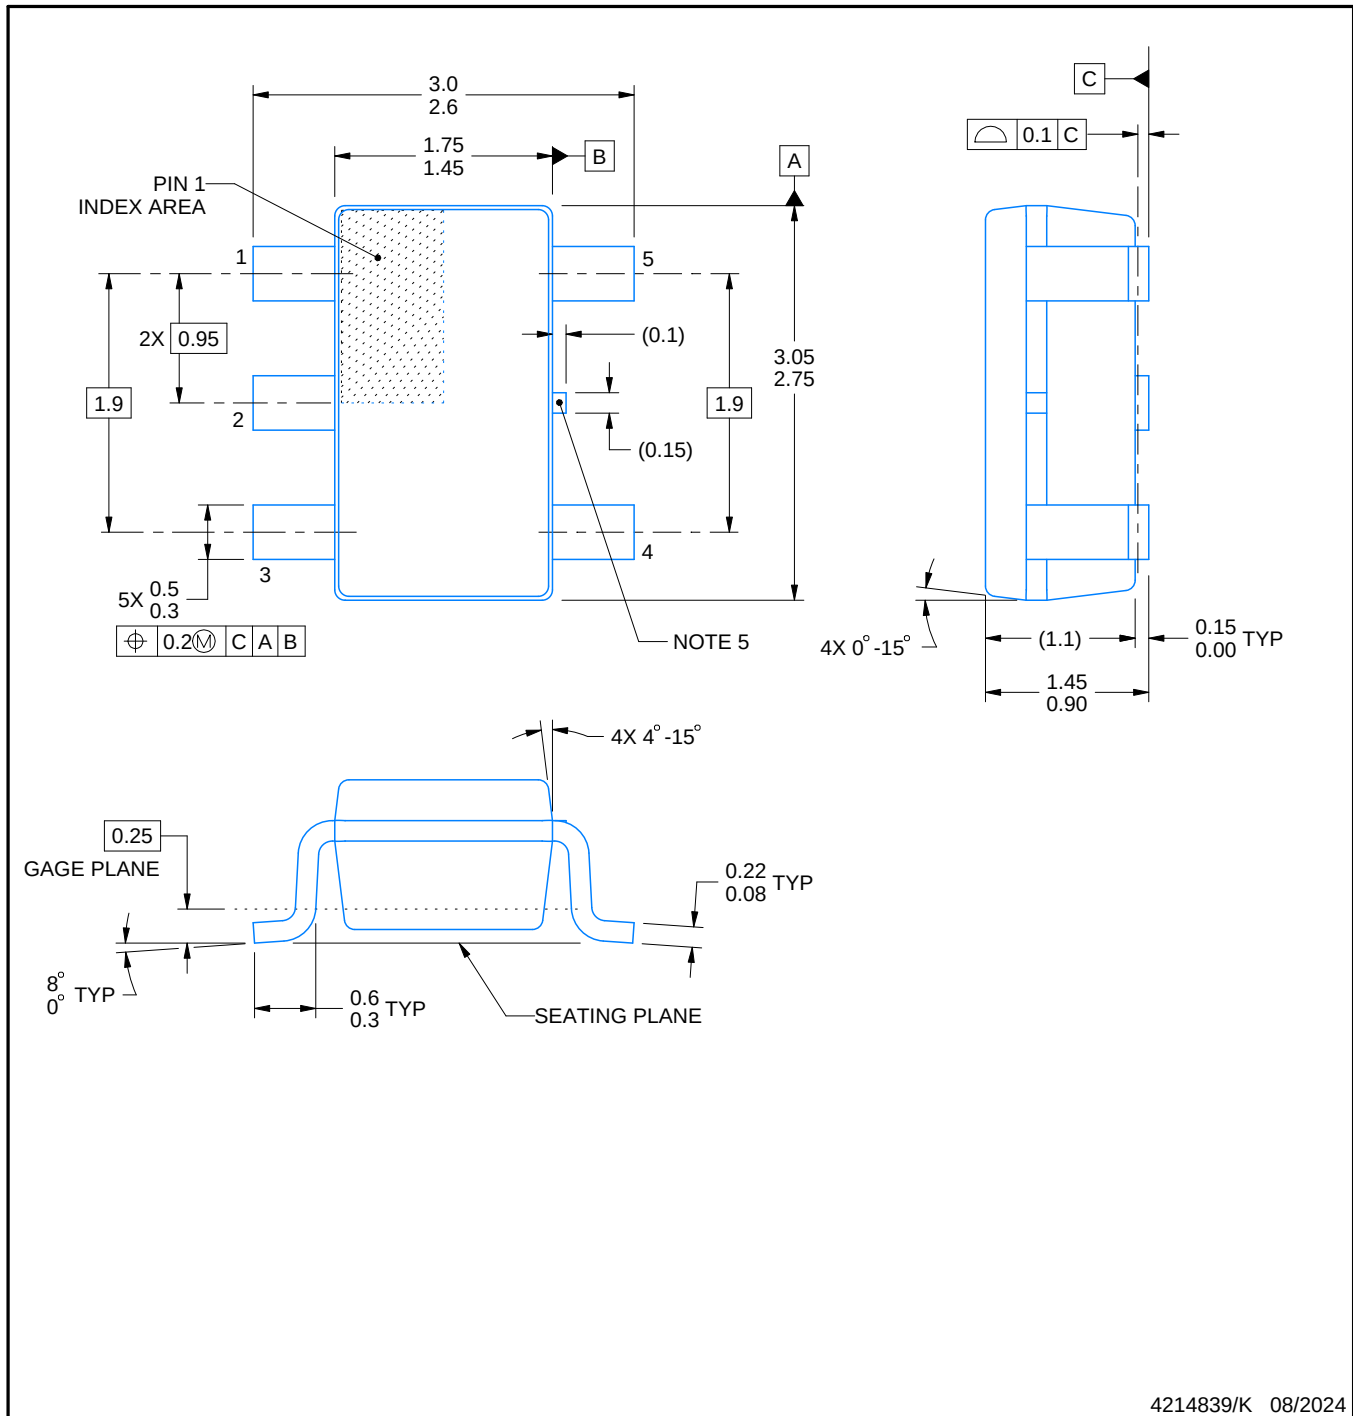

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.




**DBV0005A**

**SOT-23 - 1.45 mm max height**

SMALL OUTLINE TRANSISTOR

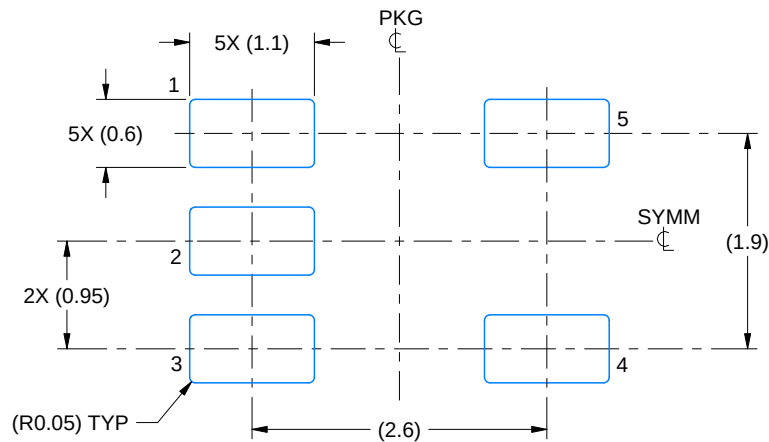

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

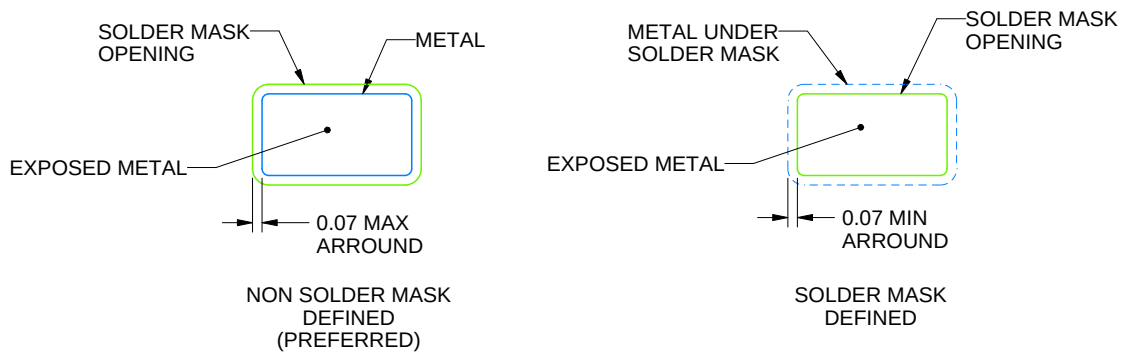

## SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.  
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

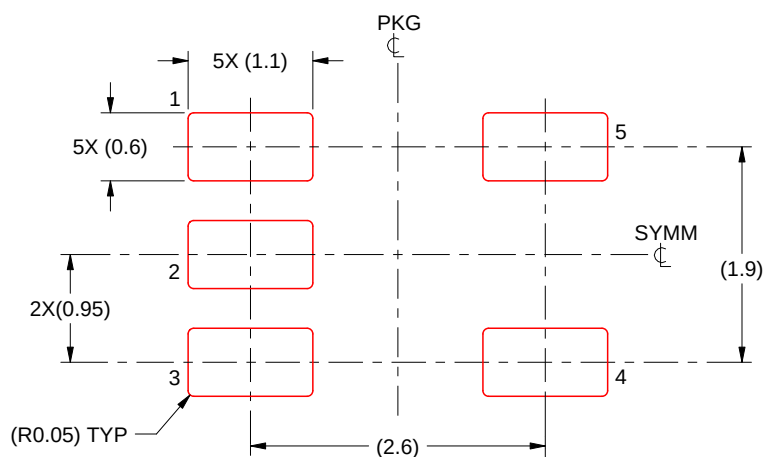


SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X



4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

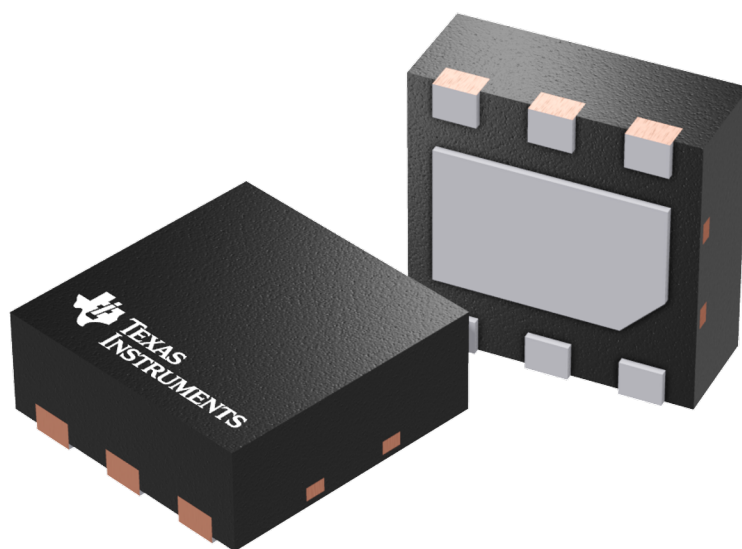

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

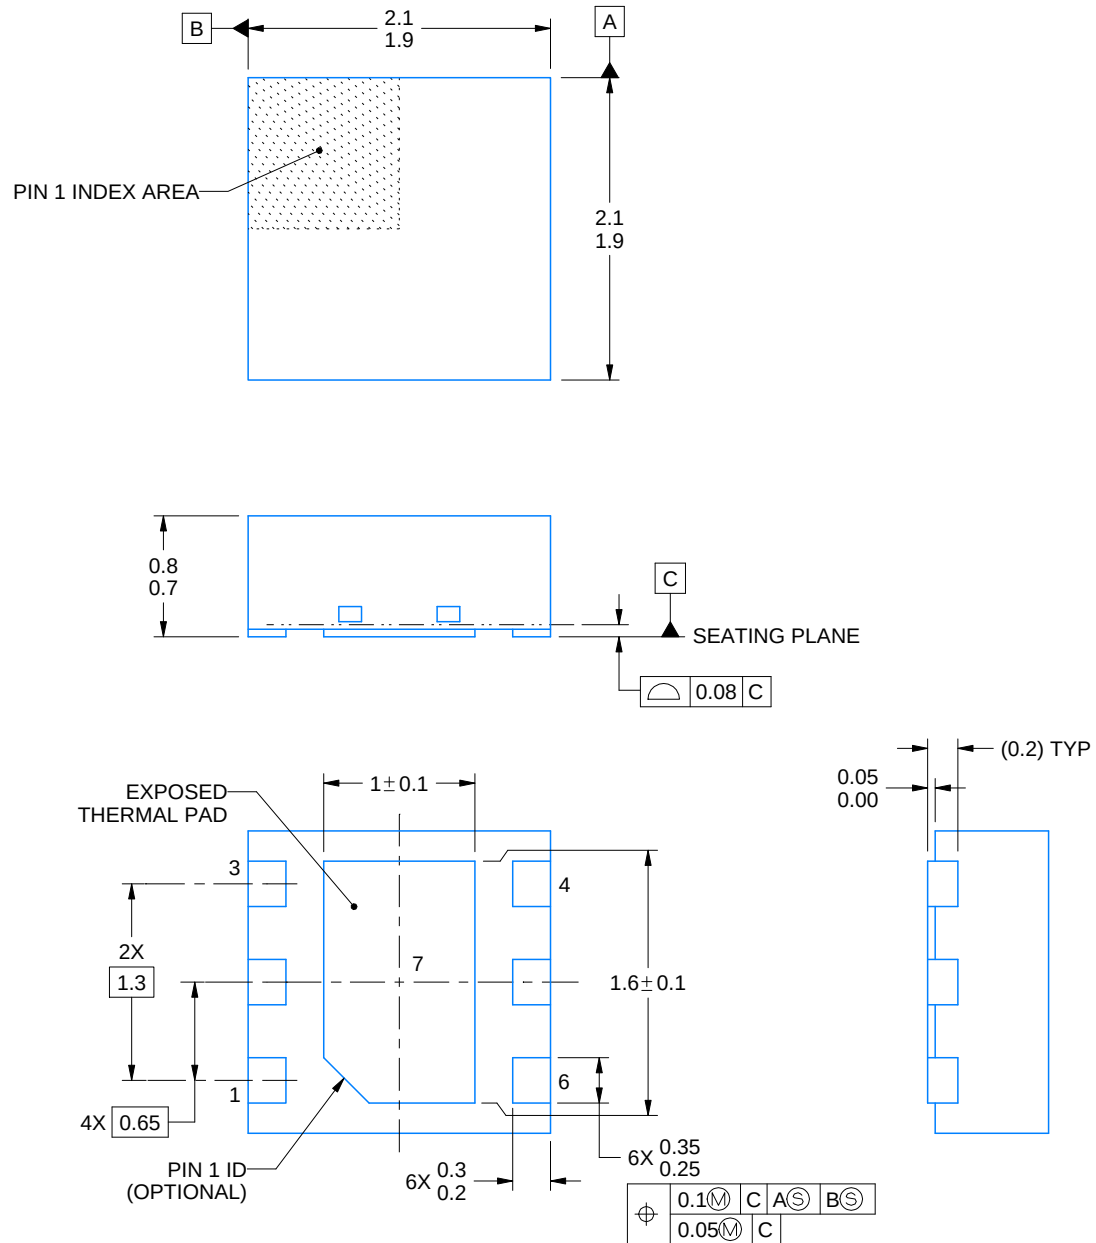

4222173/B 04/2018

**NOTES:**


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT


DRV0006A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

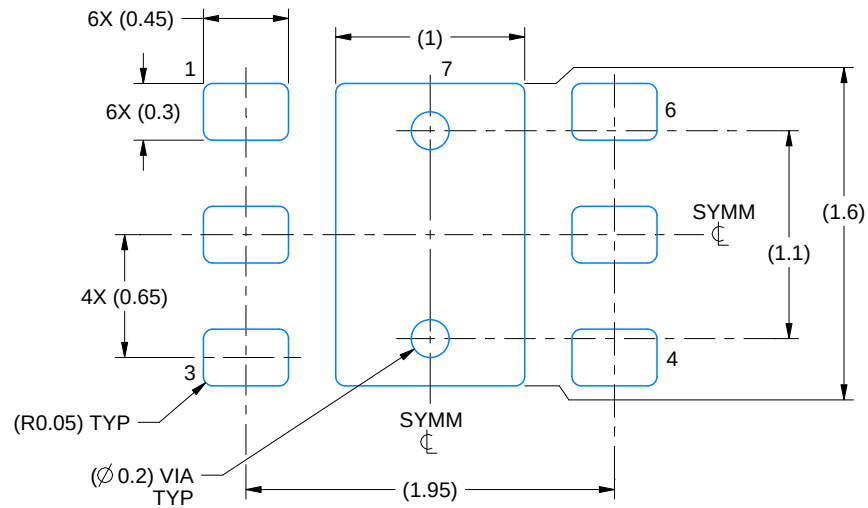

LAND PATTERN EXAMPLE  
SCALE:25X

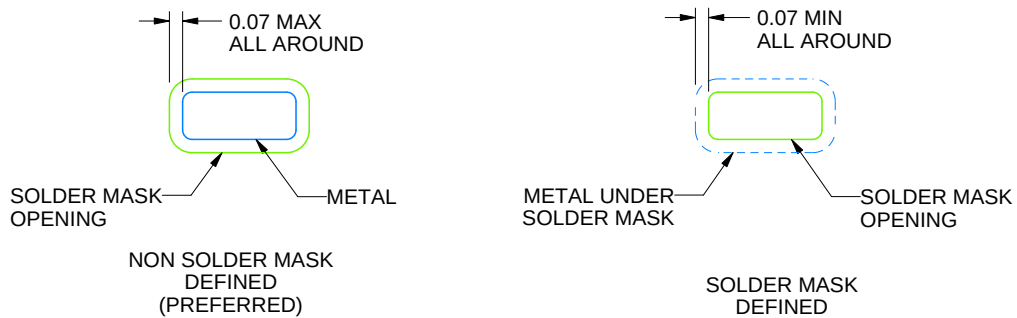

SOLDER MASK DETAILS

4222173/B 04/2018

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If some or all are implemented, recommended via locations are shown.

## EXAMPLE STENCIL DESIGN

DRV0006A

WSO - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

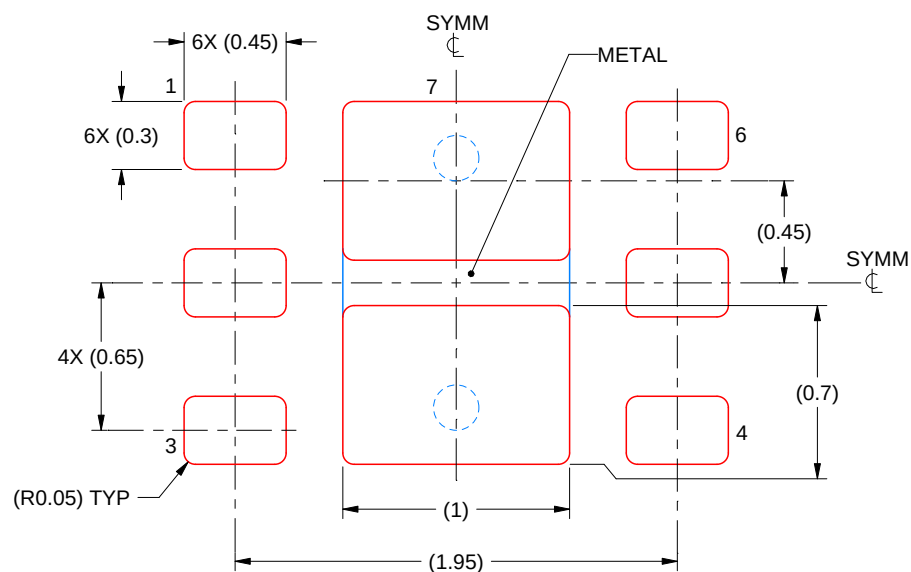

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD #7  
88% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:30X

4222173/B 04/2018


NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



**DYD0005A**

**SOT-23 - 1.45 mm max height**

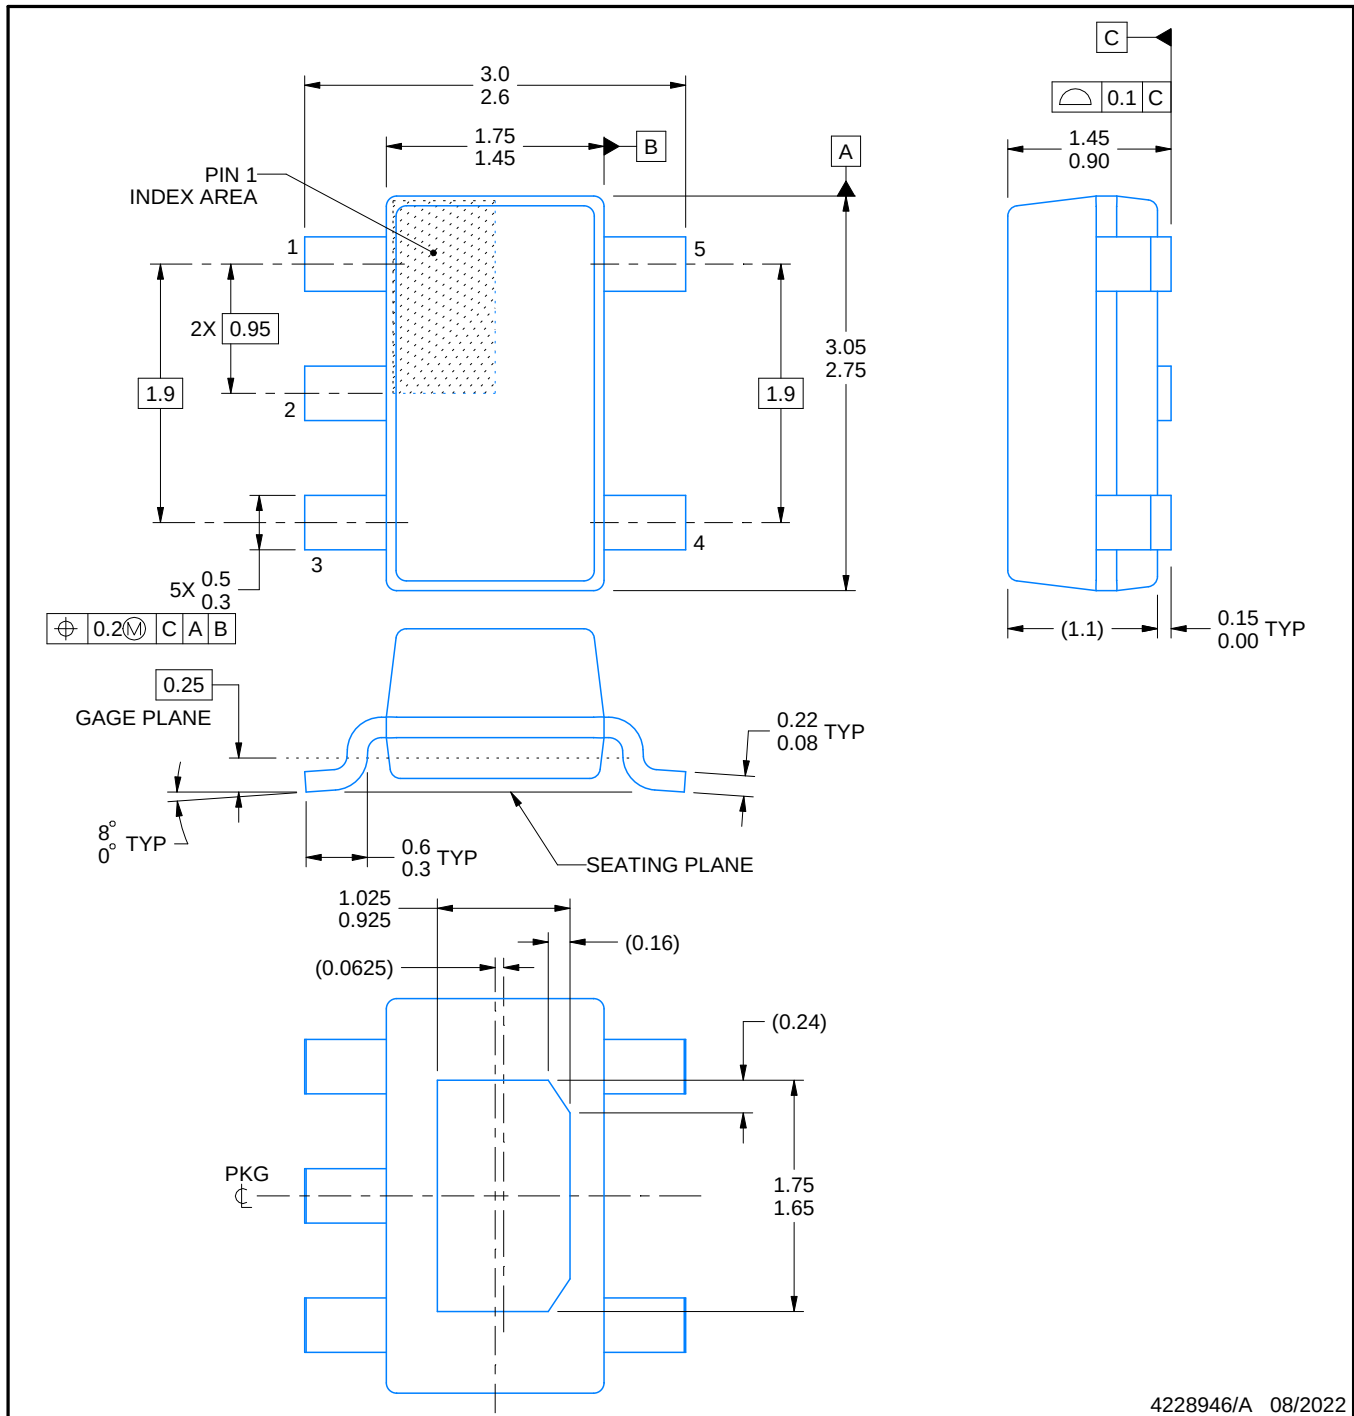

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.

# EXAMPLE BOARD LAYOUT


DYD0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

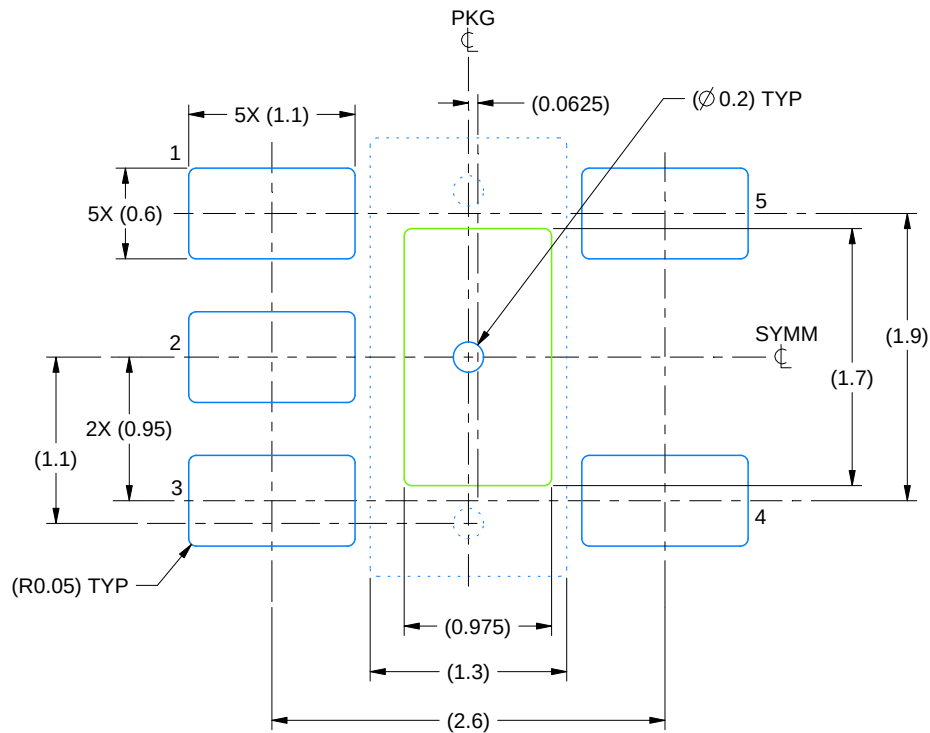

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:20X

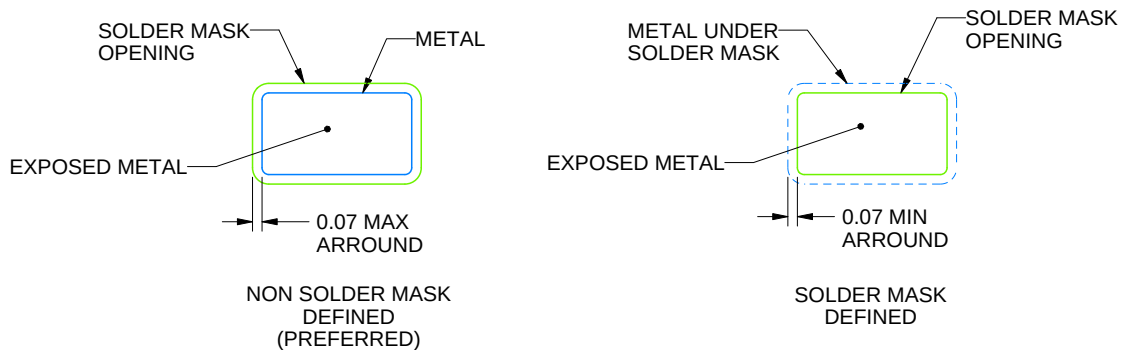

SOLDER MASK DETAILS

4228946/A 08/2022

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.




# EXAMPLE STENCIL DESIGN

DYD0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

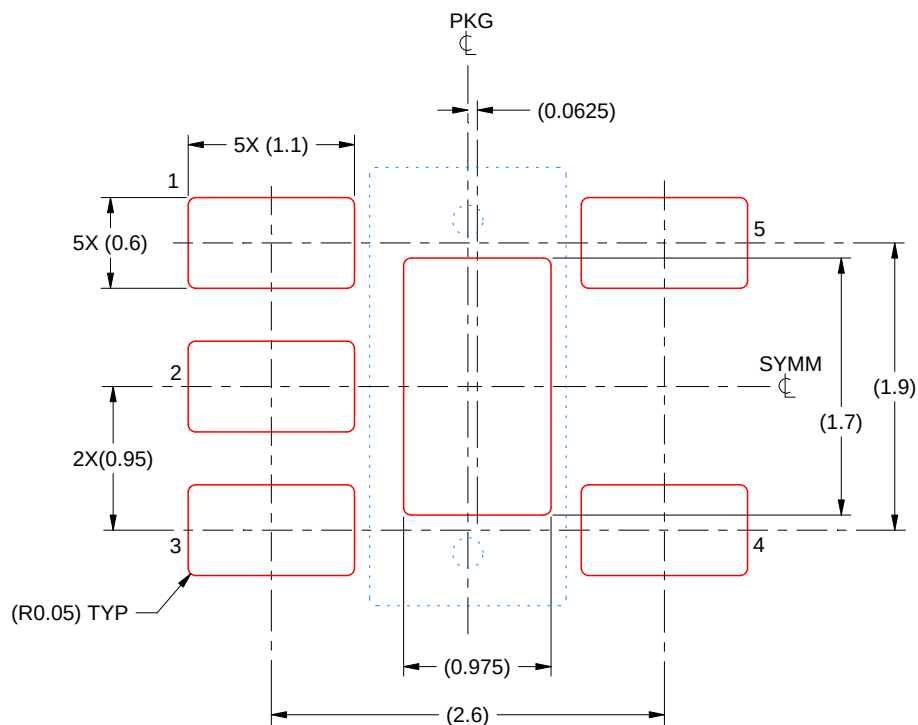

**SOLDER PASTE EXAMPLE**  
 BASED ON 0.125 mm THICK STENCIL  
 SCALE:20X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.100             | 1.09 X 1.90            |
| 0.125             | 0.975 X 1.700 (SHOWN)  |
| 0.150             | 0.89 X 1.55            |
| 0.175             | 0.82 X 1.44            |

4228946/A 08/2022

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月